



LANDSCAPE LEGEND:




code name -
sci name - Ilex Vomitoria 'Nana'
com name - Dwarf Yaupon Holly
plant size -




code name -
sci name - Pittosporum Tobira
com name - Japanese Pittosporum
plant size -




code name -
sci name - Ilex Cornuta 'Carissa'
com name - Carissa Holly
plant size -



code name -
sci name - Ilex Vomitoria
com name - Yaupon Holly
plant size -

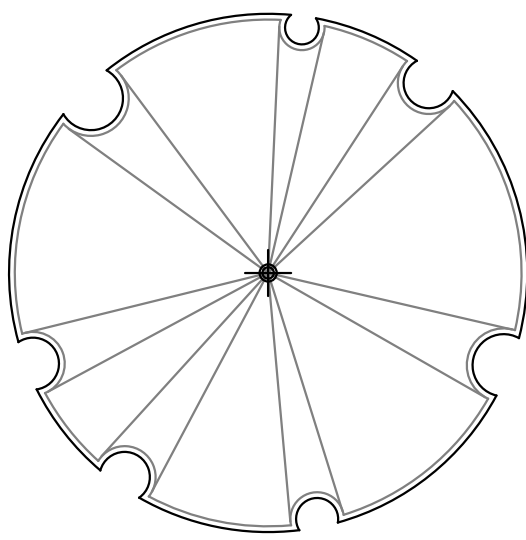


code name -
sci name - Quercus Virginiana
com name - Live Oak
plant size -



Centipede sod

LANDSCAPE NOTES:


1. CONTRACTOR TO VERIFY ALL SITE CONDITIONS PRIOR TO BID.
2. THE PLANT SIZES LISTED ARE THE MINIMUM SIZE ALLOWED.
3. ALL GROUND COVERS TO BE PLANTED IN PREPARED BEDS.
4. ALL PLANTS SHOULD CONFORM TO THE LATEST EDITION OF THE AMERICAN NURSERYMEN'S STANDARDS FOR PLANT MATERIAL.
5. WHERE MULTIPLE SIZES ARE PROVIDED FOR CALIPER, HEIGHT OR CONTAINER, THE LARGEST SIZE SHALL PREVAIL.
6. ALL TREES TO BE GUYED AND STAKED.
7. AREAS TO BE PLANTED SHALL RECEIVE 4" MATTED PINE STRAW AS TOP DRESSING.
8. SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.

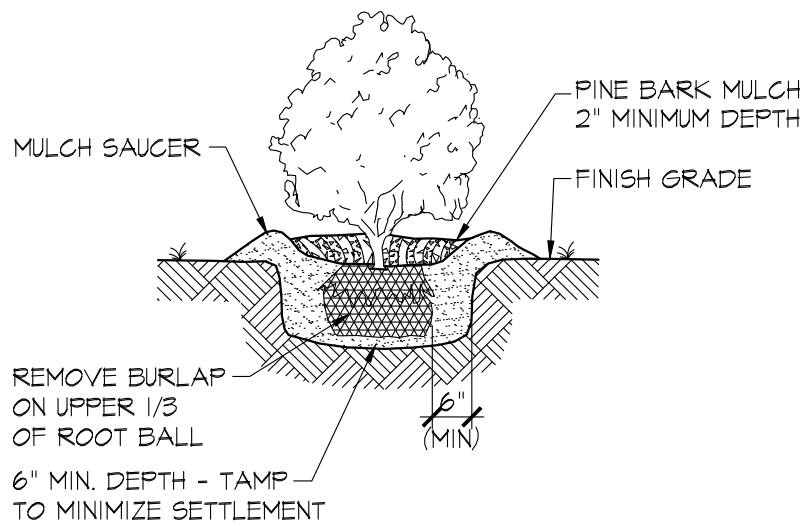

- NOTES
1. CLEANLY PRUNE ONLY DAMAGED, DISEASED AND/OR WEAK BRANCHES IF NECESSARY.
 2. FINISHED GRADE AROUND PLANT TO BE THE SAME AS ORIGINAL GRADE OF PLANT WHEN GROWN.

SHRUB PLANTING DETAIL

SCALE: 1/2" = 1'-0"

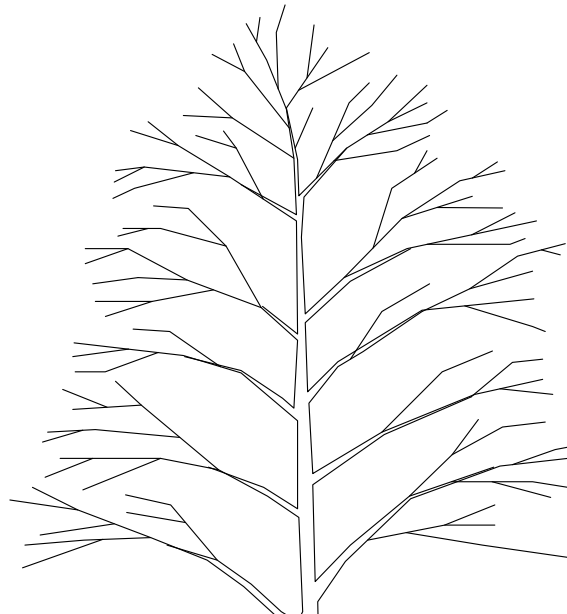

- NOTES
1. PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, AND BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED; HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN. ALL PRUNING SHALL CONFORM TO ANSI A300 STANDARDS. IMPROPERLY PRUNED TREES MAY BE REJECTED BY THE CITY.
 2. STAKE TREES ONLY WHEN NECESSARY.

TREE PLANTING DETAIL

SCALE: 1/2" = 1'-0"

PROJECT: A NEW HOUSING DEVELOPMENT

BRIARWOOD ESTATES

A KWL PROPERTIES, LLC DEVELOPMENT

BASTROP, LOUISIANA

DRAWING REVISIONS

DATE	DESCRIPTION
7/5/18	REV. - FINAL PLANS

Drawn By: CDW
Checked By: TB
SHEET

LS1.02

Date: AUGUST 2016
Project No.: 16-0052
File No.:
DESCRIPTION:

LANDSCAPING
PLANS