


DOOR #1 ADA

DOOR #2

DOOR #3


DOOR #4

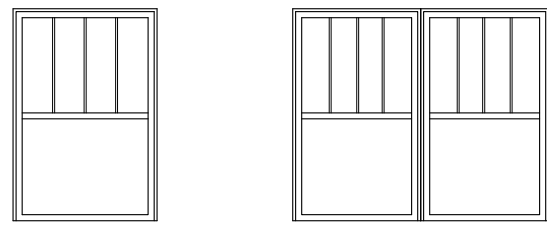

WINDOW A SEE DETAILS ON A4.01

DOOR #1 ADA

DOOR #2

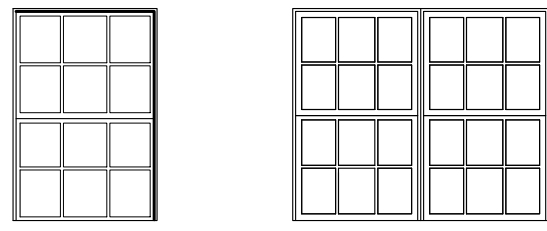

WINDOW A SEE DETAILS ON A4.01

MARK	SIZE	DESCRIPTION	HARDWARE	REMARKS
1	3/0 x 6/8 x 1-3/4"	EXTERIOR RAISED PANEL METAL INSULATED DOOR W/ 1/2 LITE	WEISER "DANE" LEVER LOCKSET WEISER "CROWN" DEADBOLT	SEE NOTES BELOW – SEE DETAILS ON A3.01
2	3/0 x 6/8 x 1-3/4"	EXTERIOR RAISED PANEL METAL INSULATED DOOR	WEISER "CROWN" PRIVACY	SEE NOTES BELOW – SEE DETAILS ON A3.01
3	3/0 x 6/8 x 1-3/8"	EXTERIOR RAISED 6 PANEL METAL INSULATED DOOR	WEISER "CROWN" PRIVACY	SEE NOTES BELOW – SEE DETAILS ON A3.01
4	3/0 x 6/8 x 1-3/8"	RAISED 6 PANEL HARD BOARD "COLONIAL" INTERIOR DOOR	WEISER "CROWN" PRIVACY AT BATHROOMS PASSAGE AT CLOSETS/PANTRIES	SEE NOTES BELOW – SEE DETAILS ON A3.01
1. ALT. #1	3/0 x 6/8 x 1-3/4"	EXTERIOR RAISED PANEL METAL INSULATED DOOR W/ DIVIDED CIRCLE 1/2 LITE	WEISER "DANE" LEVER LOCKSET WEISER "CROWN" DEADBOLT	SEE NOTES BELOW – SEE DETAILS ON A3.01
2. ALT. #1	3/0 x 6/8 x 1-3/4"	EXTERIOR RAISED PANEL METAL INSULATED DOOR W/ DIVIDED 1/2 LITE	WEISER "DANE" LEVER LOCKSET WEISER "CROWN" DEADBOLT	SEE NOTES BELOW – SEE DETAILS ON A3.01
A. BASE BID	3/0 x 4/5	SINGLE HUNG WHITE 4 LITE UPPER, LIGHT LOWER GENERAL VINYL WINDOW ENERGY EFFICIENT CLEAR INSULATED GLASS. W/ VINYL SHUTTERS.		PROVIDE SCREENS – 10 YR. WARRANTY U VALUE: 0.4 OR LESS – R VALUE: 2.5 MIN. SOLAR HEAT GAIN COEFFICIENT OF 0.4 OR LESS
B. BASE BID	PAIR OF 2/8 x 4/5	SINGLE HUNG WHITE 4 LITE UPPER, LIGHT LOWER GENERAL VINYL WINDOW ENERGY EFFICIENT CLEAR INSULATED GLASS.		PROVIDE SCREENS – 10 YR. WARRANTY U VALUE: 0.4 OR LESS – R VALUE: 2.5 MIN. SOLAR HEAT GAIN COEFFICIENT OF 0.4 OR LESS
A. ALT. #1	3/0 x 4/5	SINGLE HUNG WHITE DIVIDED 12 LITE. GENERAL VINYL WINDOW ENERGY EFFICIENT CLEAR INSULATED GLASS. W/ VINYL SHUTTERS.		PROVIDE SCREENS – 10 YR. WARRANTY U VALUE: 0.4 OR LESS – R VALUE: 2.5 MIN. SOLAR HEAT GAIN COEFFICIENT OF 0.4 OR LESS
B. ALT. #1	PAIR OF 2/8 x 4/5	SINGLE HUNG WHITE DIVIDED 12 LITE. GENERAL VINYL WINDOW ENERGY EFFICIENT CLEAR INSULATED GLASS.		PROVIDE SCREENS – 10 YR. WARRANTY U VALUE: 0.4 OR LESS – R VALUE: 2.5 MIN. SOLAR HEAT GAIN COEFFICIENT OF 0.4 OR LESS

NOTE: ALL DOORS TO BE COMPLETE AND INCLUDE: FRAMES, HARDWARE, EXTENSION JAMBS, ETC.
ALL DOORS TO BE PROVIDED WITH WEISER, OR EQUAL HARDWARE PER THIS SCHEDULE. LOCKS FOR INDIVIDUAL UNITS SHALL BE KEYED ALIKE. NO TWO UNITS SHALL HAVE MATCHING KEY CODES. ALL DEADBOLTS FOR MECH. CLOSETS (DOOR #7) SHALL BE KEYED ALIKE, BUT NOT MATCH ANY UNIT KEY CODE.
FLASH, CAULK, AND WEATHERSTRIP ALL EXTERIOR DOORS AND WINDOWS PER MFR'S INSTALLATION DETAILS.
THE EXTERIOR DOORS ARE TO BE EQUIPPED WITH AN ADA COMPLIANT THRESHOLD.

[illegible]

1. FACE BRICK SHALL BE TYPE "FB3", CONFORMING TO ASTM C-126, GRADE "MN", STANDARD SIZE = 3 1/2" x 8" x 2 1/4".
2. MORTAR MIX SHALL BE TYPE "S" CONFORMING TO ASTM C-270.
3. SAND SHALL CONFORM TO ASTM C-144.
4. MASONRY VENEER WALLS SHALL BE TIED TO STUD WALLS AT STUD LOCATIONS WITH CORRUGATED GALVANIZED METAL TIES (7/8"-22g) SPACED 24" OC HORIZONTALLY AND 16" OC VERTICALLY. (SBC 1405.2.4)
5. ALL MASONRY SHALL BE INSTALLED IN A RUNNING BOND
SO THAT VERTICAL JOINTS IN BRICKS WILL BE LOCATED OVER THE CENTER OF THE BRICK BELOW.
6. JOINTS SHALL BE TOOLED CONCAVE.
7. LOCATE CONTROL JOINTS AT A MAXIMUM 40'-0" O.C. OR AS INDICATION ON DRAWINGS.

5/8" GYPSUM BOARD LID (LOOSE)

J-MOULD ON LAST LAYER.

(2) 1/2" GYP. BOARD

TRIM SAME AS DOORS

5/8" GYPSUM BOARD LID (LOOSE)

(2) 1/2" GYP. BOARD

2X4 FRAMING MEMBER OVERLAIN W/ GYP. BD. @ OPENING


CEILING

20"

1/2" GYPSUM BOARD

TRIM SAME AS DOORS

NOTE: PROVIDE ONE ATTIC ACCESS PER EACH DRAFT SECTION OF ATTIC. LOCATE AS SHOWN ON PLAN.

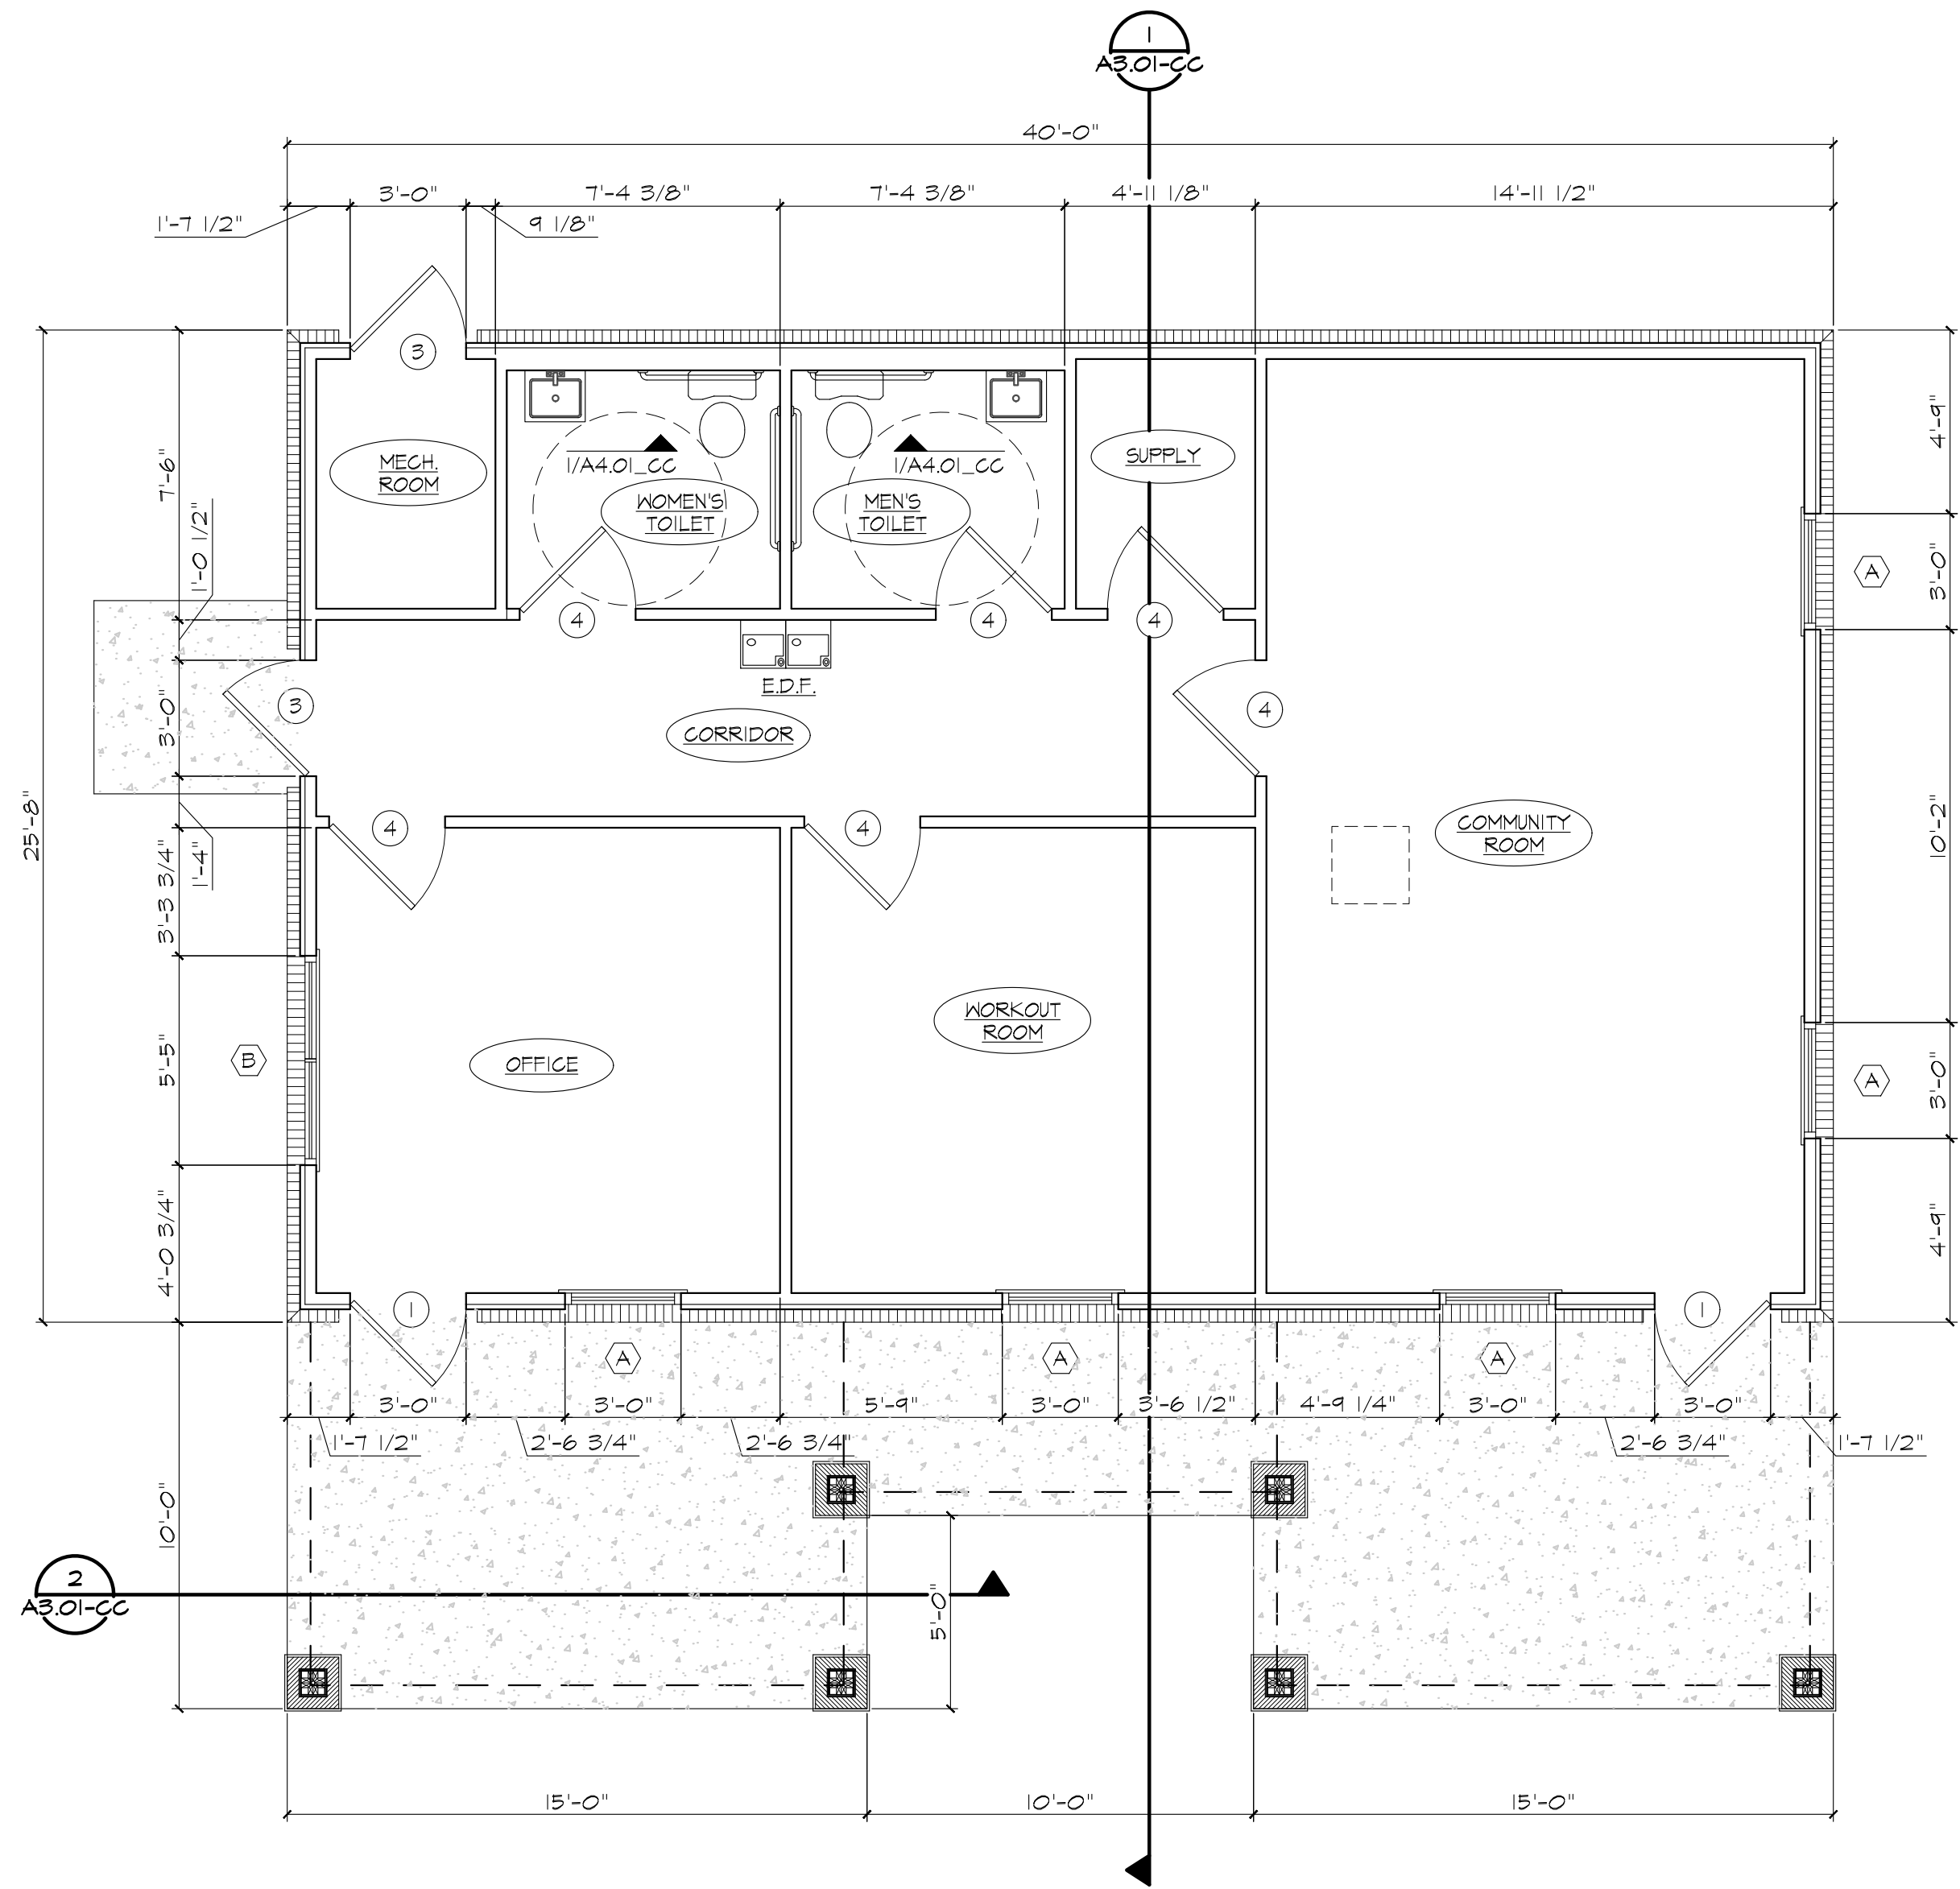

SCALE: 1/4" = 1'-0"

SQUARE FOOTAGE SUMMARY	
HEATED	988
MECHANICAL	39
PORCH	350
TOTAL UNDER ROOF (GROSS)	1377

SYMBOL LEGEND	
(B)	- WINDOW MARK
(I)	- DOOR MARK
[]	- ATTIC ACCESS (SEE DETAIL THIS SHEET)
#/A4.0L_CC	- INTERIOR ELEV. (SEE A4.0L_CC)