

A New Residence for:

River Back Estates

Osceola & Mountain Home, Arkansas



SQUARE FOOTAGE H&C: 1,954
SQUARE FOOTAGE TOTAL: 2,470

SCHEDULE OF SPECIAL INSPECTIONS				
PROJECT:		COBBLESTONE RIDGE		
		APPLICABLE TO THIS PROJECT		
MATERIAL / ACTIVITY	SERVICE	Y / N	EXTENT	AGENT DATE COMPLETED
1104.4 CONCRETE CONSTRUCTION				
Inspect reinf steel installation	Field Inspection		Periodic	2/34
Verification of req design mix	Review submittals		Periodic	3/4
Fresh concrete sampling	Field testing		Continuous	2/3
Concrete curing operations	Field review		Periodic	2/3
Evaluation of concrete strength	Field testing & review of laboratory reports		Periodic	3/4
Inspection of formwork for shape, lines, location & dimensions	Field inspection		Periodic	2/3
1104.5.1 MASONRY CONSTRUCTION (LEVEL 1)				
Verify proportions of site prepared mortar	Field & submittal review		Periodic	2/3
Verify construction of mortar joints	Field Inspection		Periodic	2/3
Verify size, grade, & type of reinforcement	Field Inspection		Periodic	2/3,4
Verify protection of rebar during hot/cold weather	Field Inspection		Periodic	2/3
Verify compliance w/ req inspection provisions	Field inspection		Periodic	2/3,4
1104.6 WOOD CONSTRUCTION				
Inspection of the fabrication process of wood structural elements & assemblies in accordance with applicable codes	In plant review		Periodic	0
1104.7 SOILS				
Verify materials below shallow foundations are adequate to achieve the design bearing capacity	Field Inspection		Periodic	1
Perform classification & testing of controlled fill materials	Field Inspection		Periodic	1
Verify use of proper materials, densities, & fill placement during placement & compaction of controlled fill	Field Inspection		Continuous	1
Verify dry-density of compacted fill complies with approved soils report	Review field testing		Periodic	1
1101.1 ARCHITECTURAL COMPONENTS SPECIAL INSPECTIONS FOR SEISMIC RESISTANCE				
Inspection during the erection & fastening of exterior cladding & interior & exterior veneer	Field Inspection		Periodic	2/3
Inspection during the erection & fastening of interior & exterior non load bearing walls	Field Inspection		Periodic	2/3
1101.2 MECHANICAL & ELECTRICAL COMPONENTS SPECIAL INSPECTIONS FOR SEISMIC RESISTANCE				
Inspection during the anchorage of other electrical assets	Field Inspection		Periodic	5/6
Inspection during installation of piping systems intended to carry flammable, combustible, or highly toxic contents & their associated mechanical units	Field Inspection		Periodic	5/6
Inspection during the installation of HVAC equipment that will contain hazardous materials	Field Inspection		Periodic	5/6
Inspection during the installation of vibration isolation supports	Field Inspection		Periodic	5/6
1108.3 REINFORCING STEEL TESTING FOR SEISMIC RESISTANCE				
Review certified mill test reports	Field review		Each Submittal	3/4
1108.5 SEISMIC QUALIFICATION OF MECHANICAL & ELECTRICAL EQUIPMENT				
Review certificate of compliance for designated seismic system components	Certificate of compliance review		Each Submittal	5/6
INSPECTION AGENT FIRM				
1 Testing Agency	NONE			
2 Testing Agency	NONE			
3 Architect	NONE			
4 Structural Engineer	NONE			
5 Mechanical Engineer	NONE			
6 Electrical Engineer	NONE			
7 Steel Fabricator	NONE			
8 Laminated Wood Mfg	NONE			
Notes:				
1. The inspection & testing agent(s) shall be engaged by the Owner or the Owner's Agent, and not by the Contractor or Subcontractor whose work is to be inspected or tested. Any conflict of interest must be disclosed to the Building Official prior to commencing work. The qualifications of the Special Inspector(s) and/or testing agency are subject to the approval of the Building Official and/or the Design Professionals.				
2. The list of Special Inspectors may be submitted as a separate document if noted so above.				
Encircle "Yes" or "No" as appropriate and date below:				
Are Requirements for Seismic Resistance Included in the Statement of Special Inspections?		Yes	No	
Are Requirements for Wind Resistance Included in the Statement of Special Inspections?		Yes	No	
Date:				
Statement of Special Inspections				
This project requires minimum special inspections. Architect will inspect all components of the framing to ensure design by or plans are followed. Images along with an Field Report will be produced and filed.				



Know what's below.
Call before you dig.
Arkansas One-Call
Dial 811 or 800-482-8998
www.arkonecall.com

APFC, VOL II, SECT 106.4 VERIFICATION:

WORK SHALL BE INSTALLED IN ACCORDANCE WITH THE REVIEWED CONSTRUCTION DOCUMENTS, AND ANY CHANGES MADE DURING CONSTRUCTION THAT ARE NOT IN COMPLIANCE WITH THE APPROVED CONSTRUCTION DOCUMENTS SHALL BE RESUBMITTED FOR APPROVAL AS AN AMENDED SET OF CONSTRUCTION DOCUMENTS.

(OWNER'S SIGNATURE)

(OWNER'S PRINTED NAME)

(GENERAL CONTRACTOR SIGNATURE)

(GENERAL CONTRACTOR PRINTED NAME)

(SUB. CONTRACTOR SIGNATURE)

(SUB. CONTRACTOR PRINTED NAME)

ABBREVIATIONS	
1	FOOT
#	INCHES
\$	NUMBERS
%	DOLLARS
%	PERCENT
&	AND
@	AT
AB	ANCHOR BOLT
AB'S	ANCHOR BOLTS
ACI	AMERICAN CONCRETE INSTITUTE
ACoust	ACOUSTICAL
AFF	ABOVE FINISHED FLOOR
AHTD	AR HIGHWAY & TRANSPORTATION
ALUM	ALUMINUM
BD	BOARD
BFE	BUILDING FLOOR ELEVATION
BLDG	BUILDING
BTUH	BRITISH THERMAL UNITS PER HOUR
C	CENTER
CAPSA	CAPACITY IN GALLONS
CFM	CUBIC FEET PER MINUTE
CERT	CERTIFIED
CLG	CEILING
CLD	CLOSET
CMP	CORRUGATED METAL PIPE
CO	COMPANY
COL	COLUMN
CONC	CONCRETE
CONTG	CONTINUOUS
COTG	CLEAN OUT TO GRADE
CTS	CURRENT TRANSFORMERS
GAL	CITY WATER & LIGHT
DBL	DOUBLE
DEPT	DEPARTMENT
DETAL	DETAIL
DIA	DIAMETER
DIR	DIRECTION
DISC	DISCONNECT
DRAN ESMT	DRAINAGE EASEMENT
DRWR	DRAWER
DS	DOWNSPOUT
DETAL	DETAIL
E	EACH
ELEC	ELECTRIC
ELEV	ELEVATION
ENC	ENCLOSURE
MTD	MOUNTED
MTL	METAL
N	NORTH
NEC	NECESSARY
OCC	ON CENTER
OCEW	ON CENTER EACH WAY
OSB	ORIENTED STRAN BOARD
PLYMD	PLYWOOD
PN	PANE
PREFIN	PREFINISHED
PROJ	PROJECTED
PSI	POUNDS PER SQUARE INCH
PVC	POLY VINYL CHLORIDE
RAFS	RETURN AIR FILTER GRILLE
RCP	REINFORCED CONCRETE PIPE
REF	REFERENCE
REINF	EACH WAY
EN	ORIENTED STRAN BOARD
EXIST	EXISTING
EXP	EXPANSION
EXT	EXTERIOR
FFE	FINISHED FLOOR ELEVATION
FIRE EXT	FIRE EXTINGUISHER
FH	FIRE HYDRANT
FND	FOUNDATION
FR	FRAME
FT	FOOT
FTG	FOOTING
G	GAS
GA	GAUGE
GALV	GALVANIZED
GB	GENERAL BEAM
GC	GENERAL CONTRACTOR
GE	GENERAL ELECTRIC
GL	GLASS
GND	GROUND
H (HOR)	HORIZONTAL
HDCP	HANDICAPPED
HT	HEIGHT
HTG	HEATING
HTR	HEATER
HVAC	HEATING VENTILATION & AIR CONDITIONING
INCL	INCLUDING
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
IT	JOINT
KN	KILOWATT
LAM	LAMINATE
LOC	LOCATION
LP	LIGHT POLE
LTG	LIGHT
MACH	MACHINE
MANUF	MANUFACTURER
MAS	MASONRY
MAX	MAXIMUM
MD	MEDIUM DENSITY FIBERBOARD
MECH	Mechanical
MIL	MILLIMETER
MIN	MINIMUM
MTD	MOUNTED
MOD	MODIFIED
OHE	OVERHEAD ELECTRIC
OV	VERTICAL
VERT	VERTICAL
VTR	VENT THRU ROOF
W	WEST
W	WITH
WH	WATER HEATER
WKF	WELDED WIRE FABRIC
WWM	WELDED WIRE MESH
YR	YEAR
RE	CENTER LINE
RE	REQUIRED
S	SOUTH
S	SET BACK
SCHED	SCHEDULE
SF	SQUARE FOOT
SIP	SET IRON PIPE
SJ	SAM JOINT
SS	SANITARY SEWER
ST	STANDARD
STL	STEEL
SUSP	SUSPENDED
T&B	TOP AND BOTTOM
TB	TIE BEAM
TU	TURN DOWN
TK	THICK
TRM	TOP OF BENCH MARK
TRANS	TRANSVERSE
T	TELEPHONE
TV	TELEVISION
UG	UNDERGROUND ELECTRIC
UTIL	UTILITY
UTIL ESMT	UTILITY EASEMENT
W	WATER

PROJECT PROFESSIONALS:

CONSULTANT: MORTIN DESIGN SERVICES
CONTACT: BRITANY MORTIN
BEEBE, AR 72012
(810) 284-4054 Office

CONTRACTOR: OLYMPUS CONSTRUCTION
CONTACT: TONY PARSON
JONESBORO, AR 72401
(810) 432-3544 Office

SHEET INDEX	
COVER SHEET - RESIDENCE "D"	
SITE DEVELOPMENT PLANS (BY OTHERS)	
1	FOUNDATION PLAN NOTES, DETAILS, AND SCHEDULES
2	FLOOR PLAN - OPENING SCHEDULES
3	EXTERIOR & INTERIOR ELEVATIONS
4.1	FRAMING PLAN NOTES, DETAILS, AND SCHEDULES
4.2	ROOF PLAN
5	HVAC PLAN NOTES, DETAILS, AND SCHEDULES
6	PLUMBING PLAN NOTES, DETAILS, AND SCHEDULES
7	ELECTRICAL POWER & LIGHTING PLAN ELECTRICAL POWER RISER DIAGRAM

MATERIAL LEGEND	
	FACEBRICK
	MASONRY BLOCK
	PLYWOOD
	WOOD (FINISH OR STUD WALL)
	WOOD (BLOCKING)
	INSULATION (BATT)
	INSULATION (RIGID)
	GYP. BOARD OR PLASTER
	METAL
	METAL STUDS
	CONCRETE


SYMBOL LEGEND	
	SECTION SHEET
	DETAIL SHEET
	OPENING
	GENERAL NOTE
	LEVEL CHANGE
	NORTH ARROW
	WALL ELEVATION SHEET
	FIXTURE


COVER SHEET - RESIDENCE "D"

MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

COMM. NO.: 454222
DATE: 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com



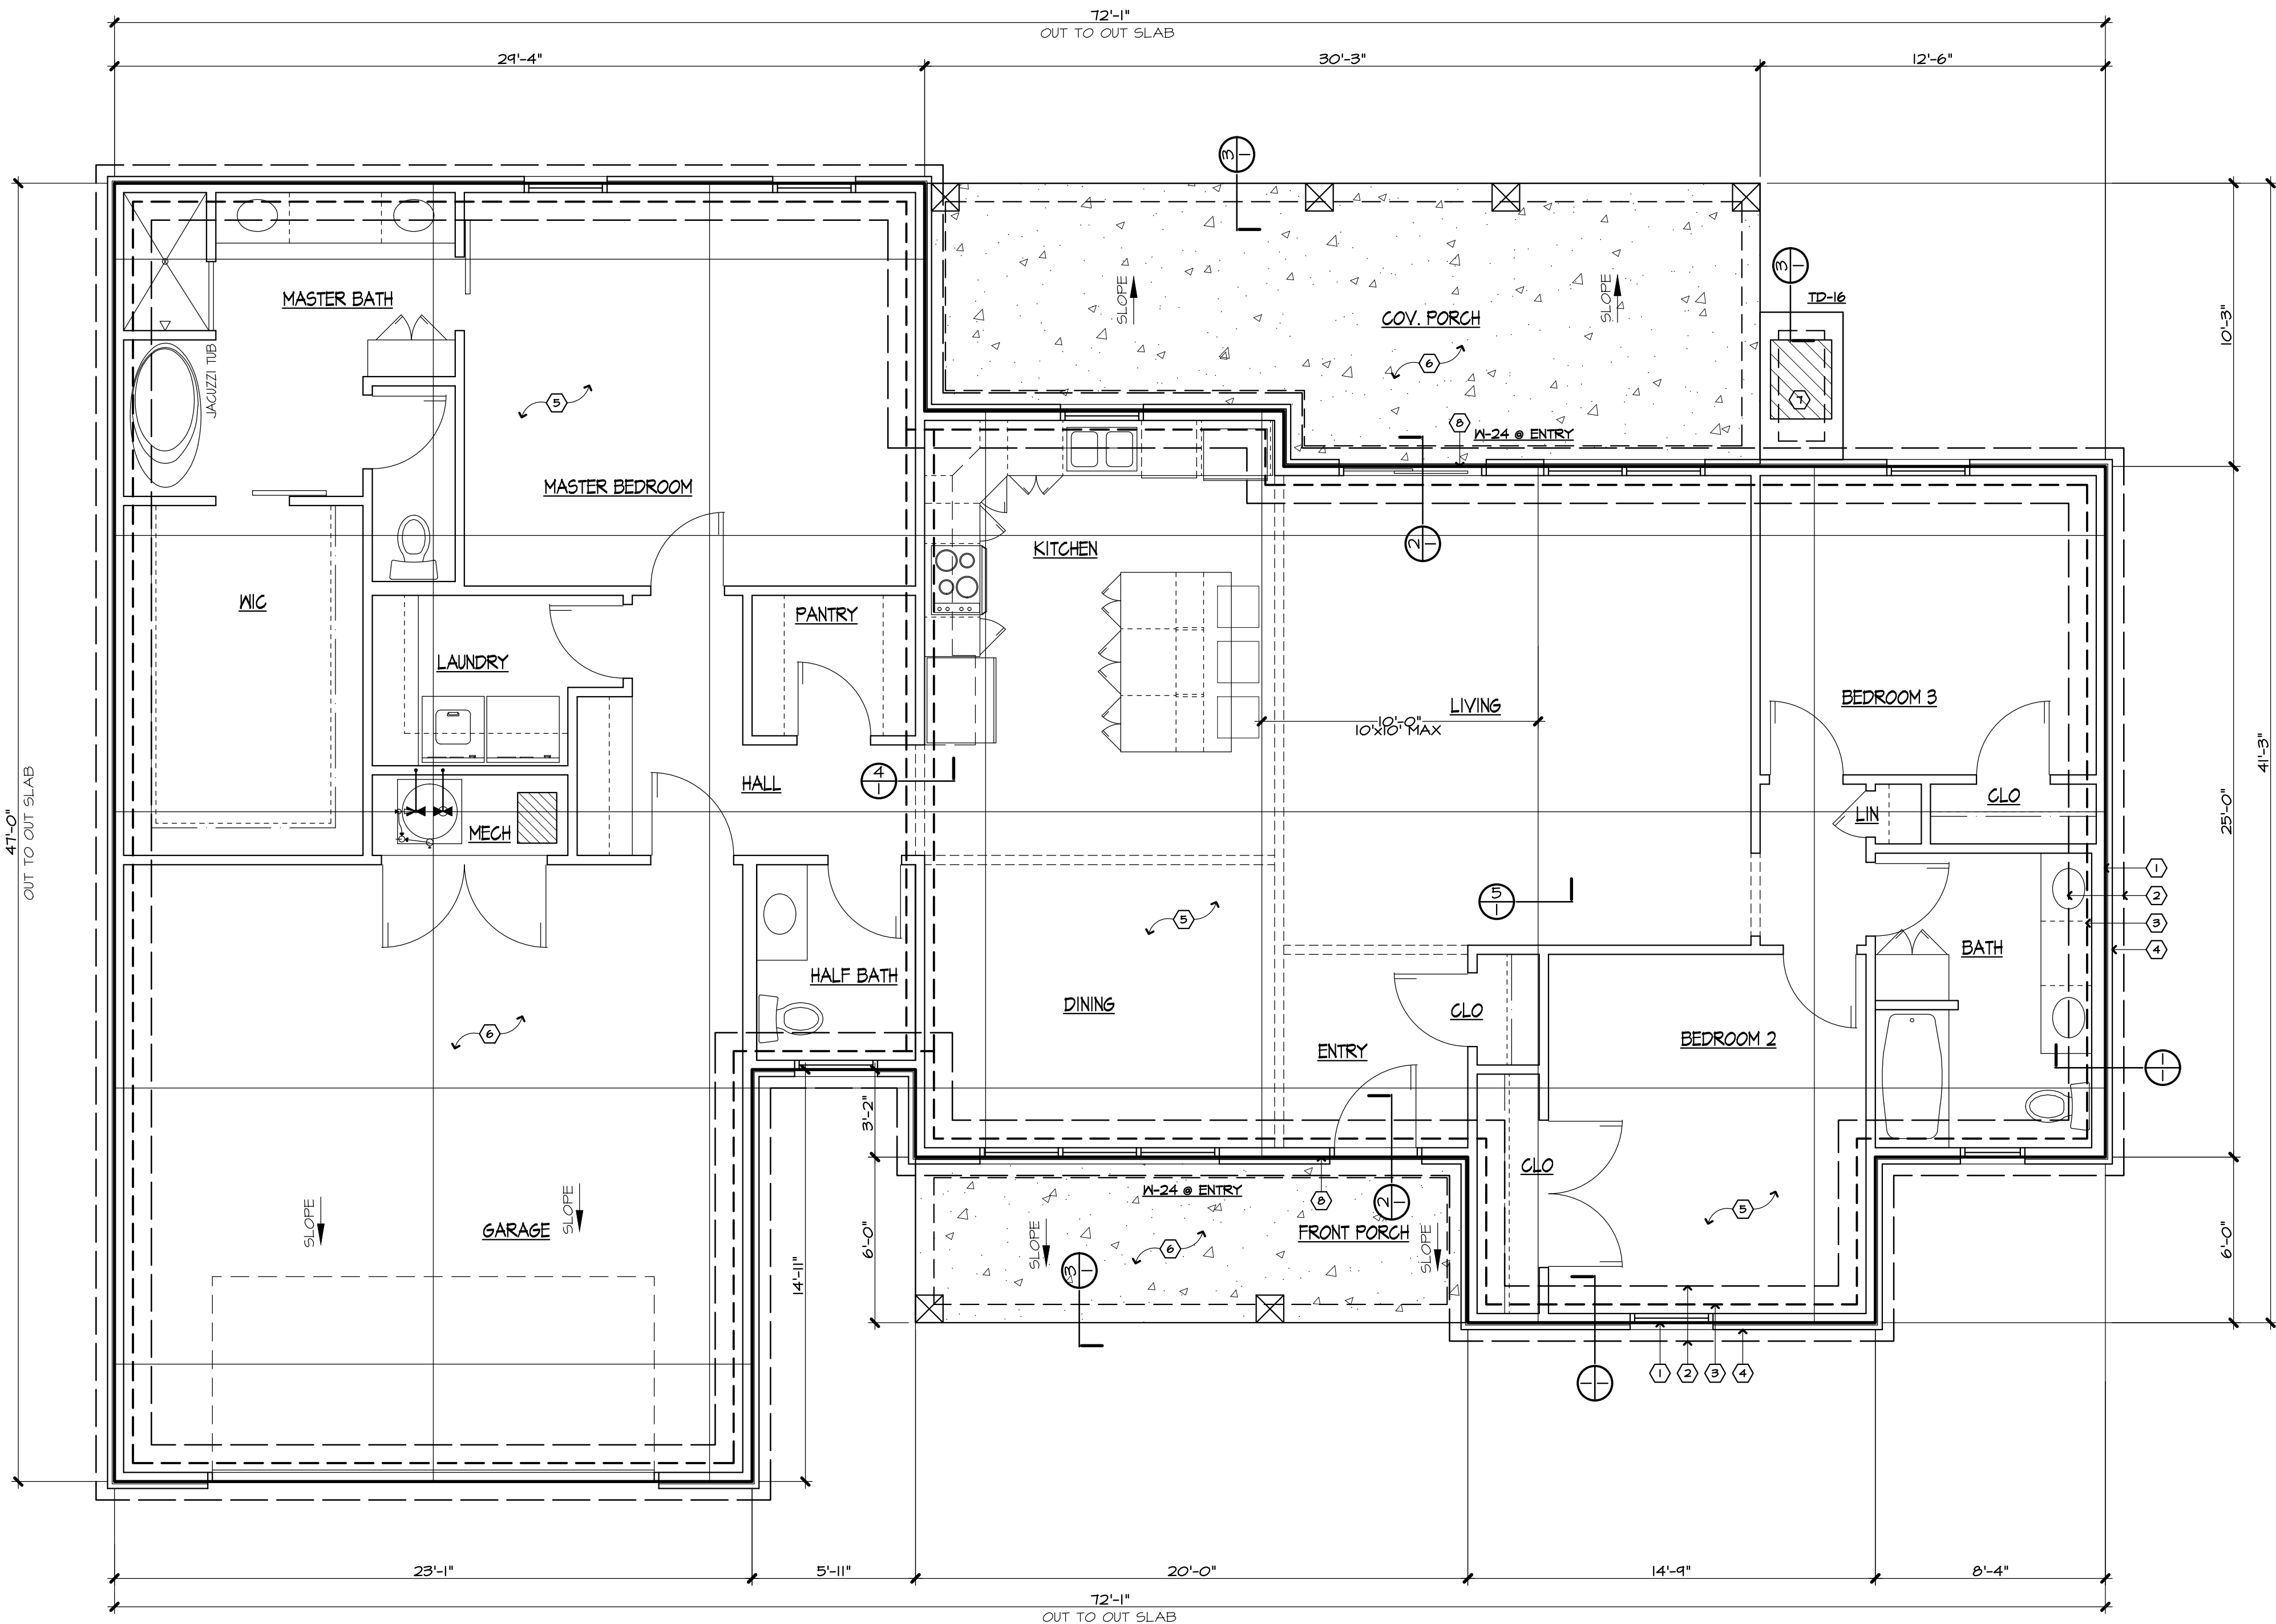




FOUNDATION PLAN
1/4" = 1'-0"
NOTE: SEE SITE PLANS FOR BUILDING LAYOUT
SEE SITE PLAN

GENERAL NOTES FOUNDATION PLANS	
MARK	DESCRIPTION
1	EDGE OF SLAB
2	LINE OF FOOTING
3	LINE OF FOUNDATION WALL
4	LINE OF EXTERIOR MATERIAL - SEE EXT ELEVATIONS FOR REF
5	4"TK CONC SLAB REINF w/ 6x6 W4xW4 OVER 6 MIL VAPOR BARRIER OVER CLEAN COMPACTED FILL - 45% PROCTOR
6	4"TK CONC SLAB REINF w/ 6x6 W4xW4 OVER 6 MIL VAPOR BARRIER OVER CLEAN COMPACTED FILL - BROOM FINISH - 45% PROCTOR - ALL EXTERIOR CONCRETE TO BE 5% AIR ENTRAINED
7	4"TK CONC STOOP FOR HVAC UNIT (TYP) - SEE HVAC PLANS FOR REF
8	DROP SLAB 1/2" THIS LOG - SEE DETAIL FOR REF

FOOTING SCHEDULE			
MARK	SIZE	DESCRIPTION	REMARKS
N-24	12"x24"xCONT w/ 8"x16"D GB	(3) #5s CONT w/ #4 TIES @ 48" OC (2) #5s CONT w/ #4 VERT DOMELS @ 48" OC EXT 24" INTO SLAB (2) #4s CONT EXTENDED INTO SLAB	(1)
N-24 @ ENT	12"x24"xCONT w/ 8"x16"D GB	(3) #5s CONT w/ #4 TIES @ 48" OC (2) #5s CONT w/ #4 VERT DOMELS @ 48" OC EXT 24" INTO SLAB (2) #4s CONT EXTENDED INTO SLAB (1) #5s CONT @ STOOP FTG	(1)
TS	16"x68"DxCONT	(2) #5s CONT - TIE INTO VERT DOMELS @ PERIMETER FTG's	(2)
TD-16	8"x16"D	(2) #4s CONT w/ #4 VERT DOMELS @ 16" OC EXT 24" INTO SLAB	
F-36	36"x36"x12"	(3) #5s 30" EA MAY, w/ (4) #4s VERT IN PIER WITH #4 TIES @ 8" OC STARTING 5" BELOW SLAB SURFACE	
F-48	48"x48"x12"	(5) #5s 42" EA MAY, w/ (4) #4s VERT IN PIER WITH #4 TIES @ 8" OC STARTING 5" BELOW SLAB SURFACE	

REMARKS FOOTING SCHEDULE	
(1)	SIMPSON MAS' MUDSILL ANCHOR CAST IN SLAB - SEE DETAIL FOR SPACING
(2)	ANCHOR BOLTS CAST INTO SLAB - SEE DETAIL FOR SIZE & SPACING

ENGINEERING GENERAL NOTES	
1.	ALL REINFORCING STL TO BE ASTM A615 GR60
2.	3500 PSI CONC w/ 4" SLUMP FOR ALL FOOTINGS - 4,000 PSI CONC w/ 4" SLUMP FOR SLAB
3.	ALL REINFORCING STL TO HAVE MIN 3" COVER WHEN EXPOSED TO SOIL
4.	ALL FOOTINGS TO BEAR ON UNDISTURBED SOIL OR ENGINEERED FILL w/ MIN 2,500 PSF BEARING CAPACITY
5.	ALL EXTERIOR CONCRETE TO BE 5% AIR ENTRAINED

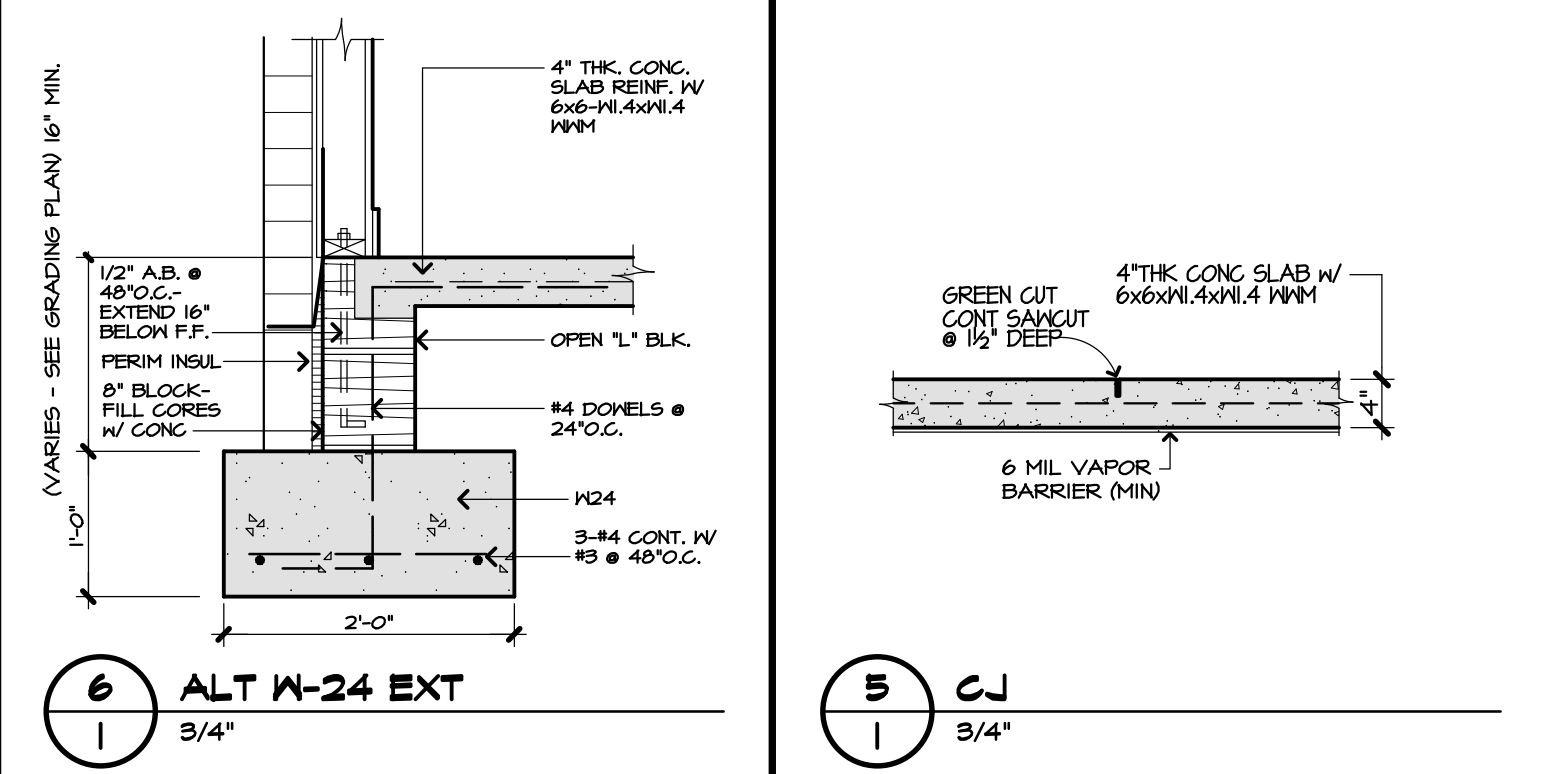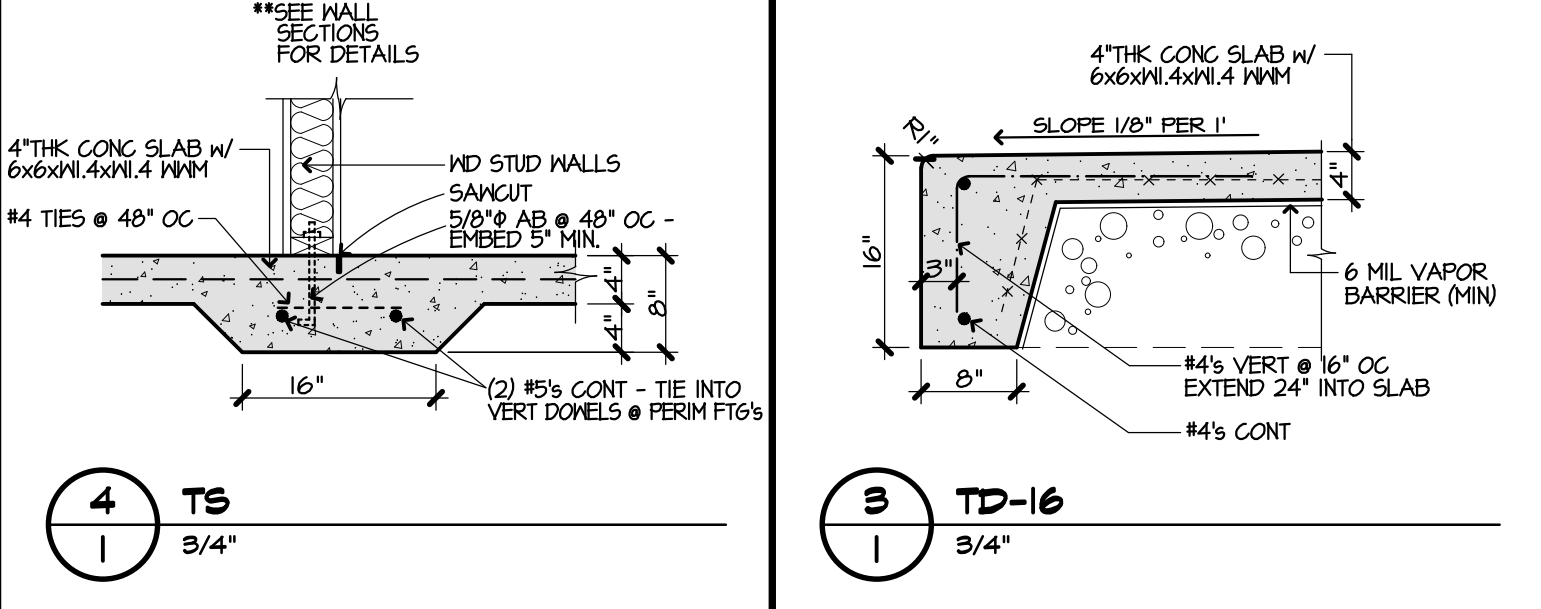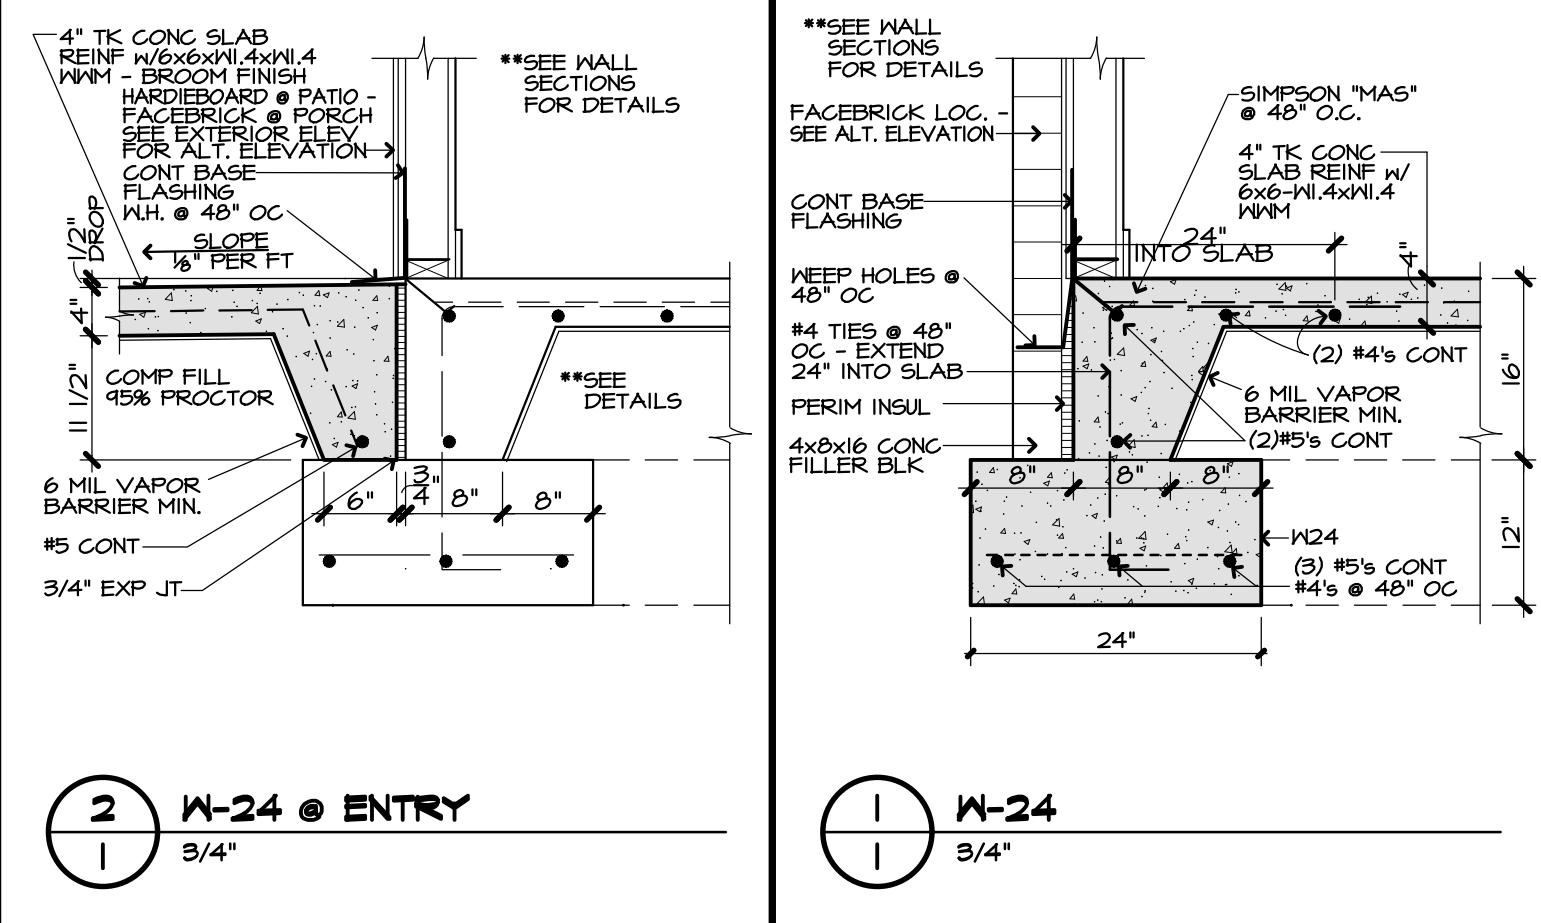


FOUNDATION PLAN
NOTES, DETAILS, AND SCHEDULES

MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

COMM. NO.: RB422
DATE: 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com

MDS

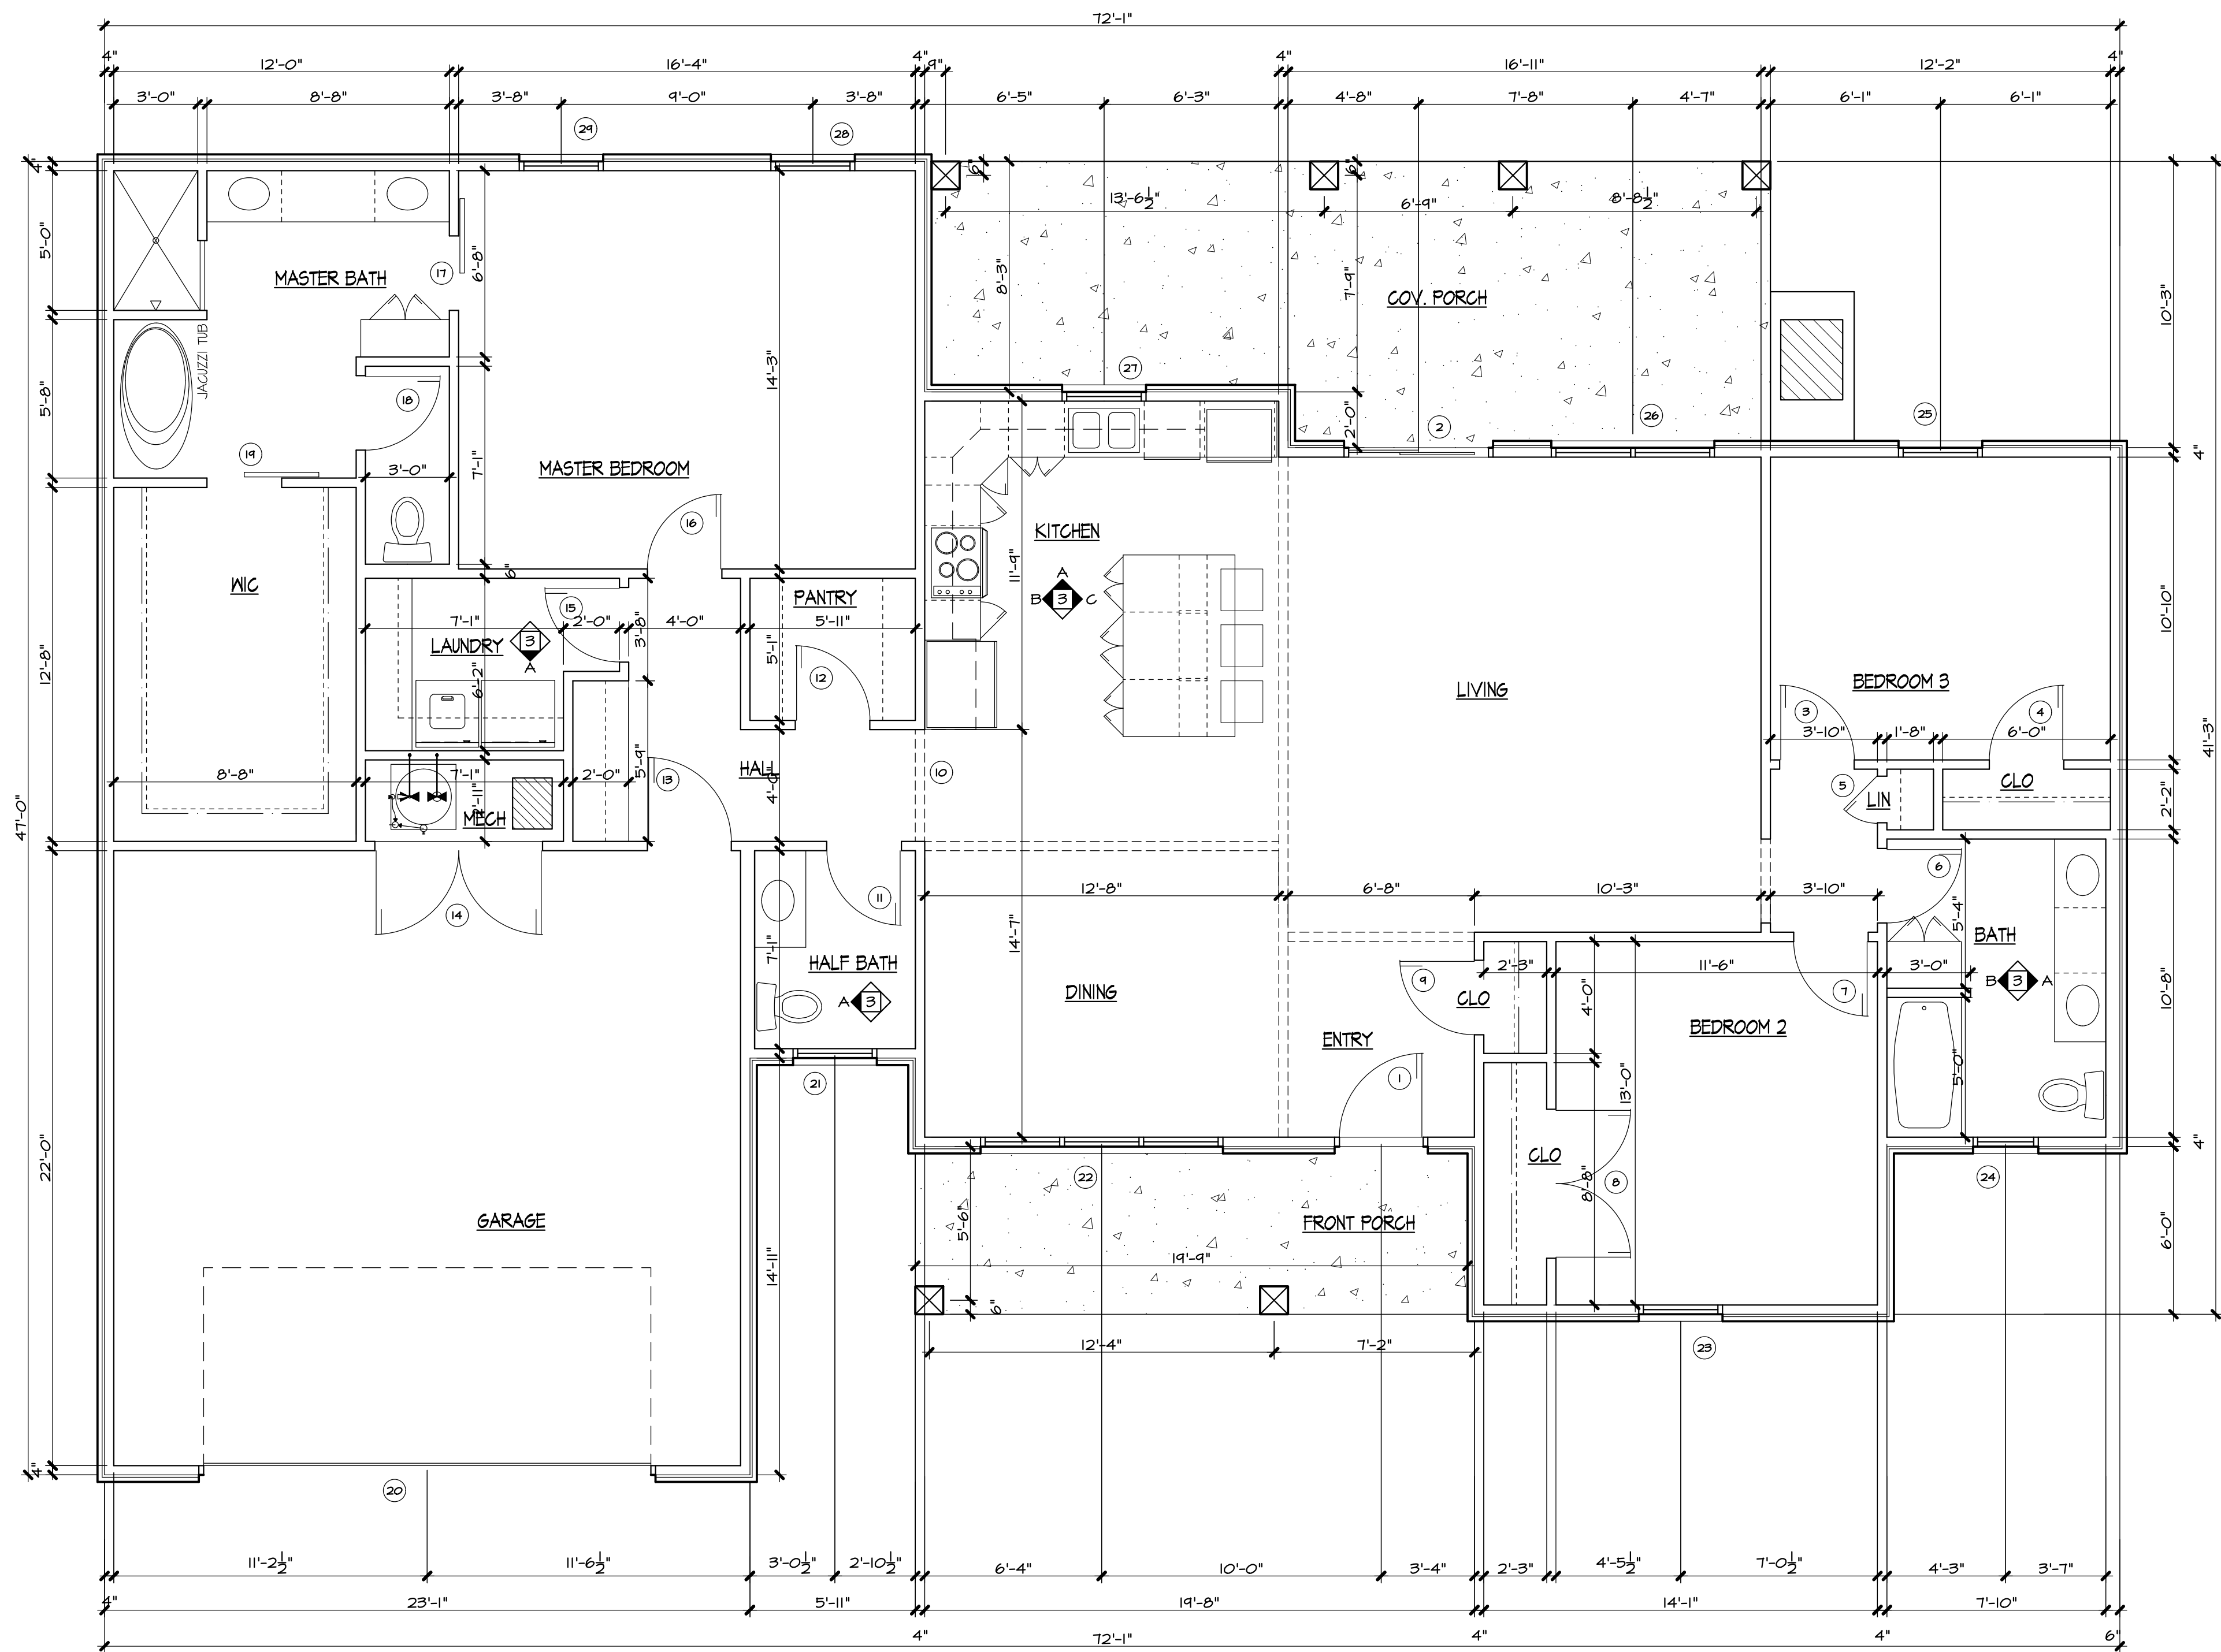


FLOOR PLAN
1/4"
SQUARE FOOTAGE H&G: 1,954
SQUARE FOOTAGE TOTAL: 2,410

OPENING SCHEDULE ALL HARDWARE TO BE CLOSE FIST OPERABLE - VERIFY TYPE W/ OWNER
VERIFY BLINDS TYPE & COLOR W/ OWNER

MARK	DOORS					REMARKS
	W	H	T	MAT	TYPE	
1	3'-0"	6'-8"		HM	SEE ELEV	LOCK SET W/ DEADBOLT
2	6'-0"	6'-8"		ALUM	SEE ELEV	SLIDING W/ LOCK SET
3	2'-8"	6'-8"		WD		PRIVACY SET
4	2'-8"	6'-8"		WD		CLOSET SET
5	1'-8"	6'-8"		WD		CLOSET SET
6	2'-8"	6'-8"		WD		PRIVACY SET
7	2'-8"	6'-8"		WD		PRIVACY SET
8	(2)2'-6"	6'-8"		WD		CLOSET SET
9	2'-8"	6'-8"		WD		CLOSET SET
10	4'-0"	6'-8"		WD		CASED OPENING
11	2'-8"	6'-8"		WD		PRIVACY SET
12	2'-8"	6'-8"		WD		CLOSET SET
13	3'-0"	6'-8"		HM		LOCK SET
14	(2)2'-6"	6'-8"		WD		CLOSET SET
15	2'-8"	6'-8"		WD		CLOSET SET
16	2'-8"	6'-8"		WD		PRIVACY SET
17	2'-8"	6'-8"		WD		CASED OPENING W/ BARN DR PROVIDED HARDWARE
18	2'-8"	6'-8"		WD		PRIVACY SET
19	2'-8"	6'-8"		WD		CASED OPENING W/ BARN DR PROVIDED HARDWARE
20	16'-0"	8'-0"		ALUM	SEE ELEV	GARAGE DR W/ MOTOR & SENSORS THIS CONTRACT

WINDOWS						
21	3'-0"	3'-6"	2"	ALUM	SEE ELEV	
22	(3)3'-0"	5'-0"	2"	ALUM	SEE ELEV	
23	3'-0"	5'-0"	2"	ALUM	SEE ELEV	
24	3'-0"	5'-0"	2"	ALUM	SEE ELEV	
25	3'-0"	5'-0"	2"	ALUM	SEE ELEV	
26	(2)3'-0"	5'-0"	2"	ALUM	SEE ELEV	
27	3'-0"	3'-6"	2"	ALUM	SEE ELEV	
28	3'-0"	5'-0"	2"	ALUM	SEE ELEV	
29	3'-0"	5'-0"	2"	ALUM	SEE ELEV	

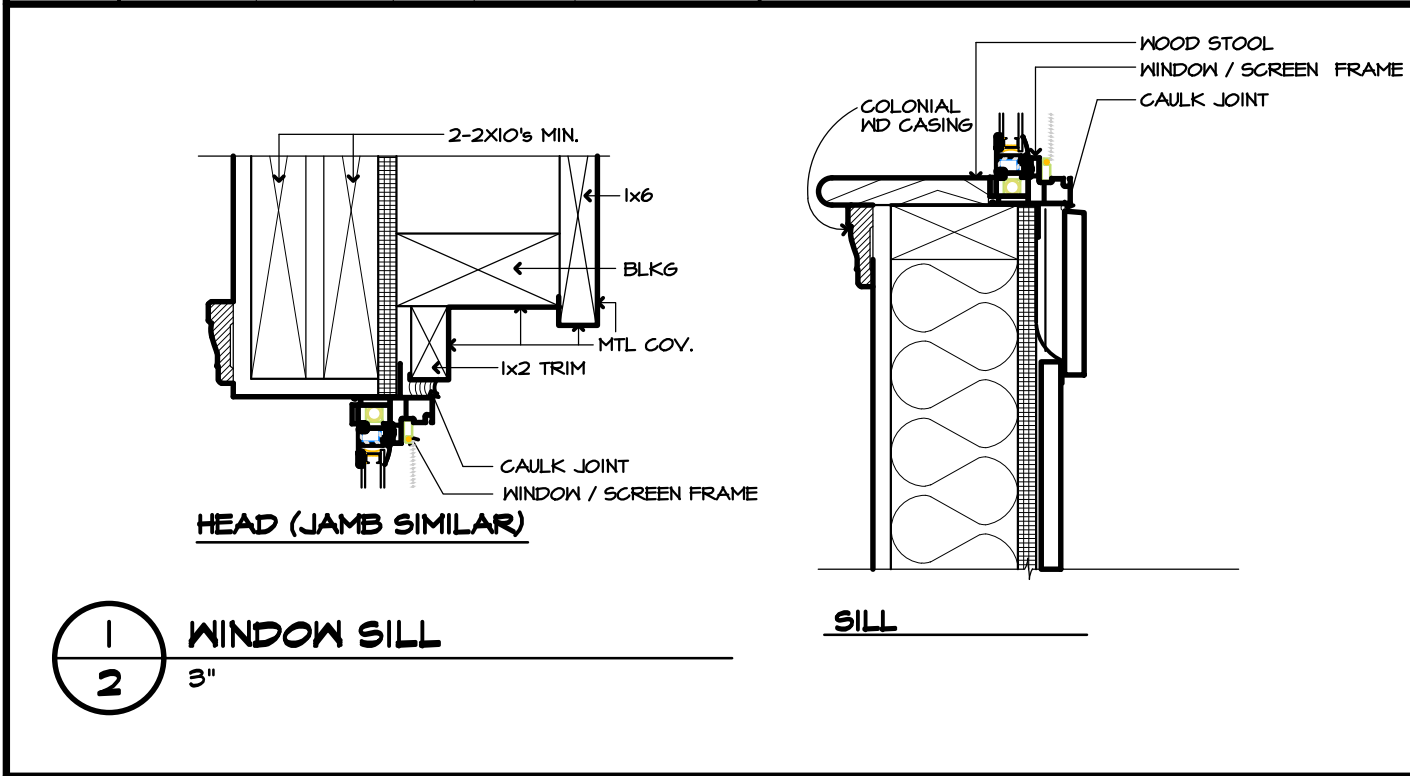

INTERIOR FINISH SCHEDULE						
SPACE	FLOOR	BASE	WALLS	CEILING	CLG HT	REMARKS
GARAGE	LVT - COLOR BY OWNER	4" WOOD BASE - PAINTED	5/8"TK TYPE 'X' GYP BD 5/8"TK TYPE 'WRX' GYP BD	5/8"TK TYPE 'X' GYP BD 5/8"TK TYPE 'WRX' GYP BD	9'-0"	(2)
ENTRY	•	•	•	•	•	(2)
LIVING	•	•	•	•	•	(2)
DINING	•	•	•	•	•	(2)
KITCHEN	•	•	•	•	•	(1), (2)
HALL	•	•	•	•	•	(2)
MUDROOM	•	•	•	•	•	(2)
LAUNDRY	•	•	•	•	•	(1), (2)
PANTRY	•	•	•	•	•	(2)
MASTER BEDROOM	•	•	•	•	•	(2)
MASTER BATH	•	•	•	•	•	(1), (2)
BEDROOM 2	•	•	•	•	•	(2)
BEDROOM 3	•	•	•	•	•	(1), (2)
BATH	•	•	•	•	•	(2)
WIC	•	•	•	•	•	(1), (2)
CLO	•	•	•	•	•	(2)


REMARKS INTERIOR FINISH SCHEDULE
1 INSTALL 5/8"TK TYPE 'WRX' GYP BD AT ALL NET WALL LOCATIONS
2 ALL GYP BD WALLS TO BE PAINTED










FLOOR PLAN - OPENING SCHEDULES

MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES


CON: K.S. 45432
DATE: 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com




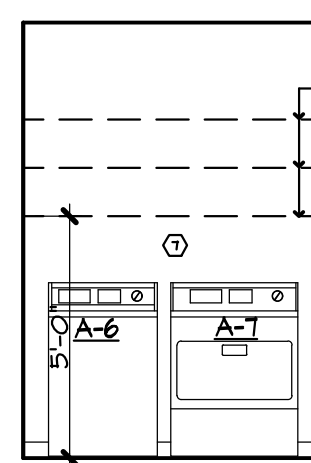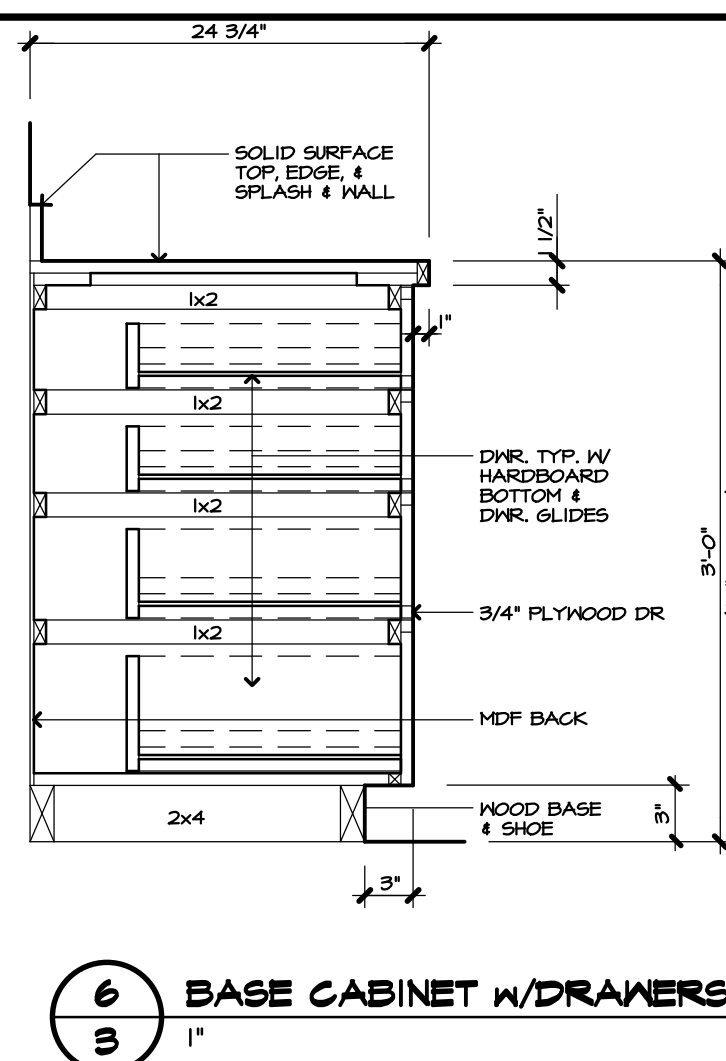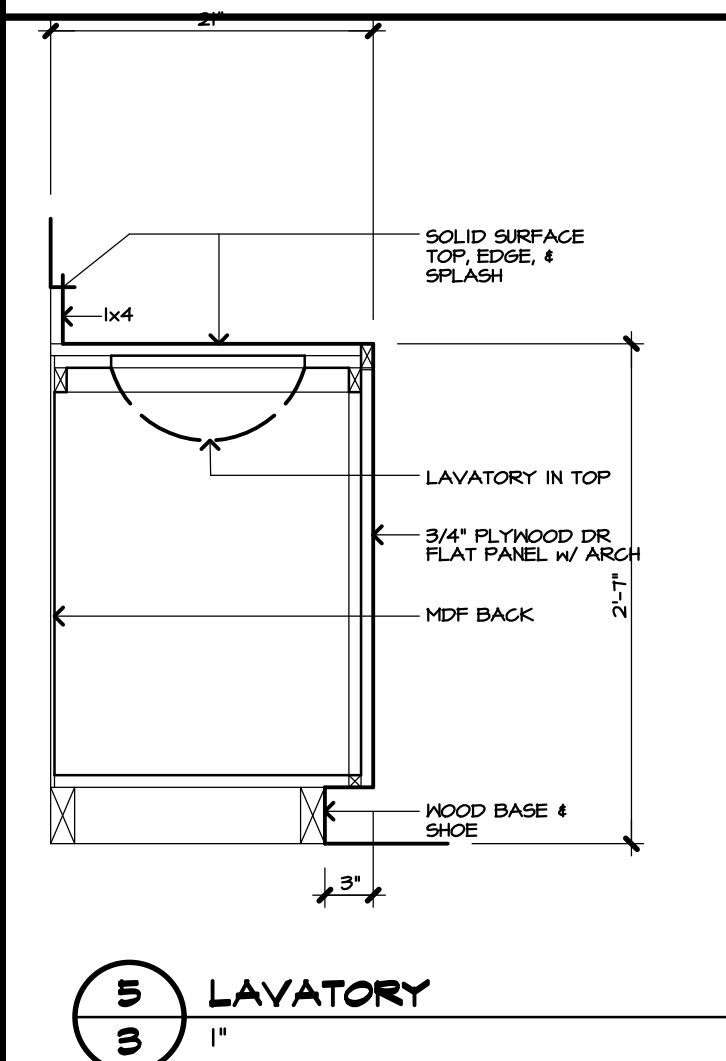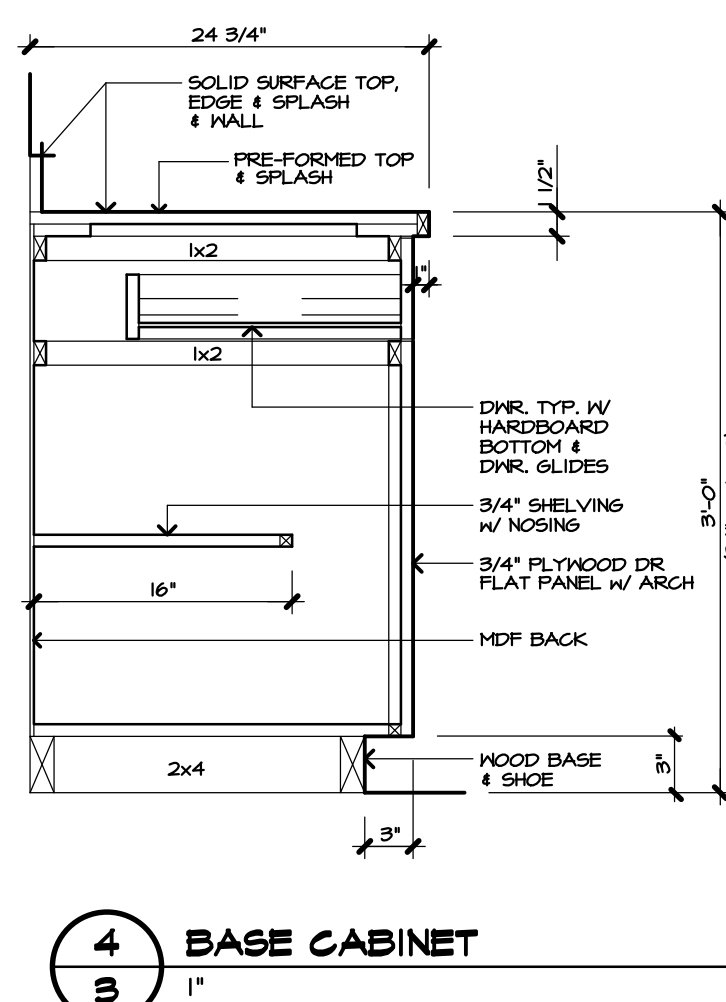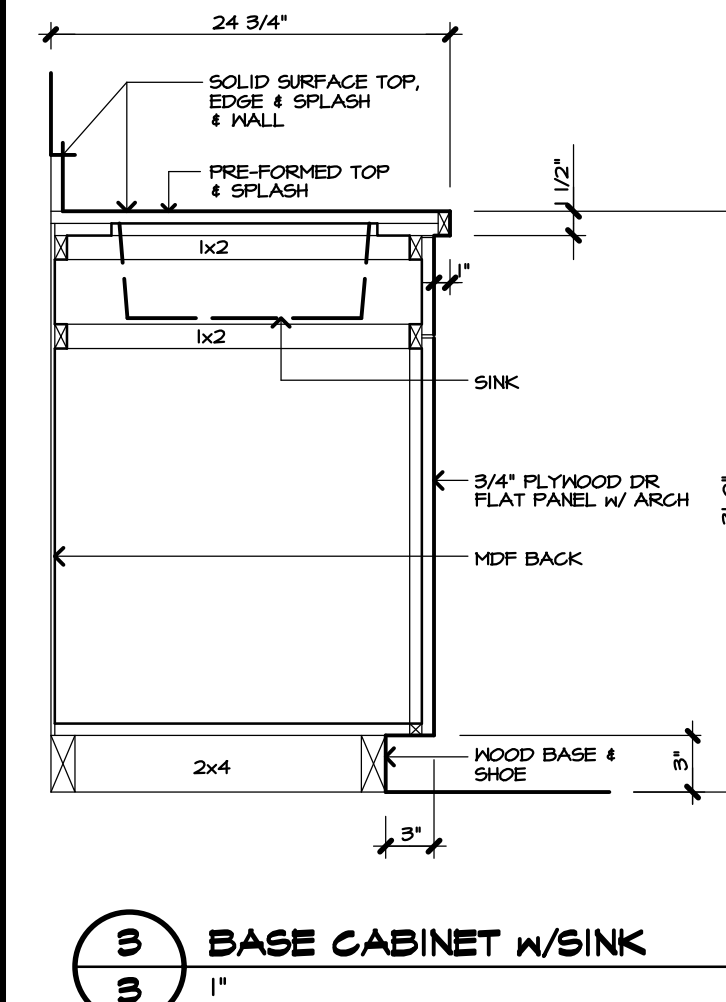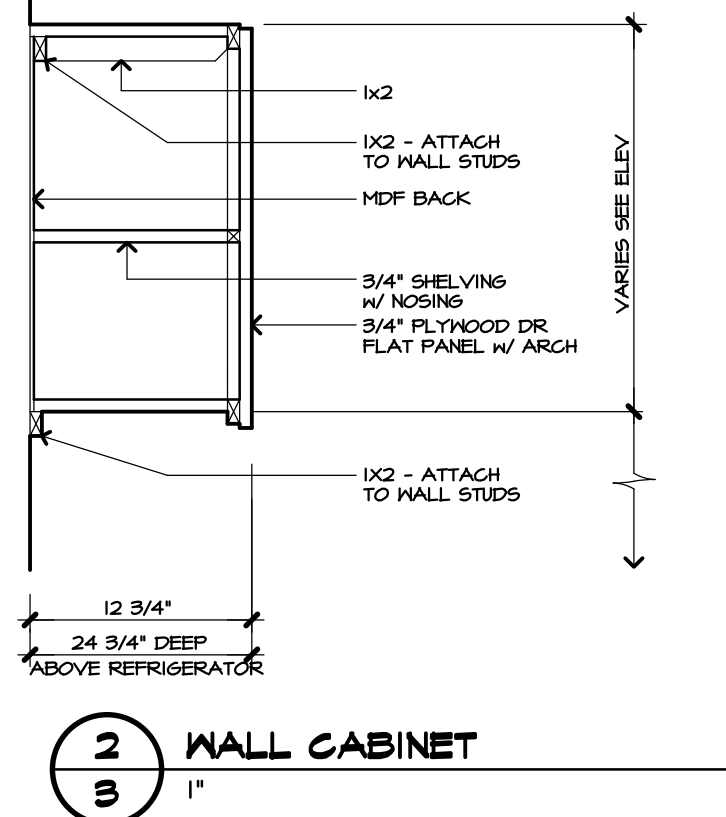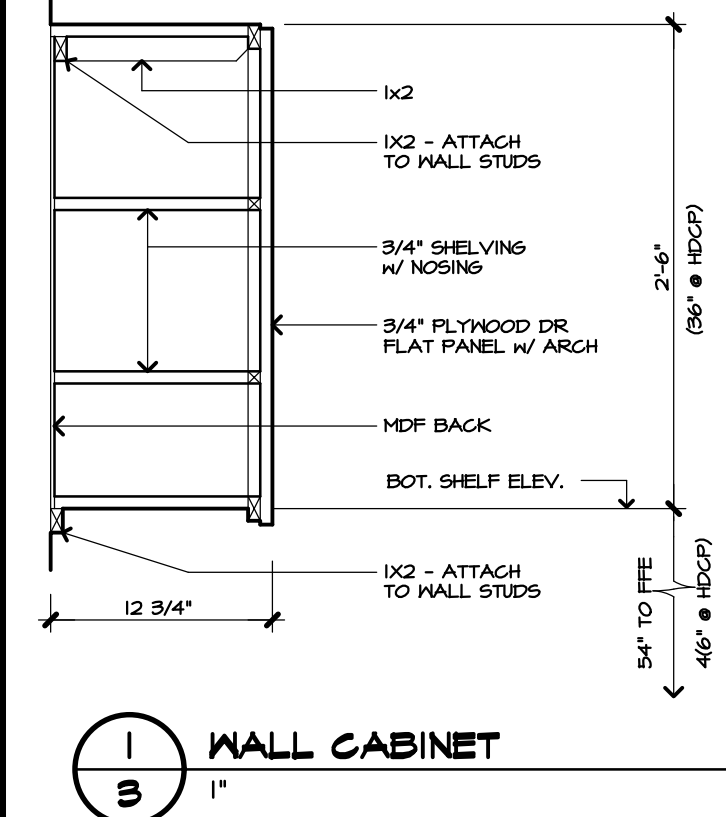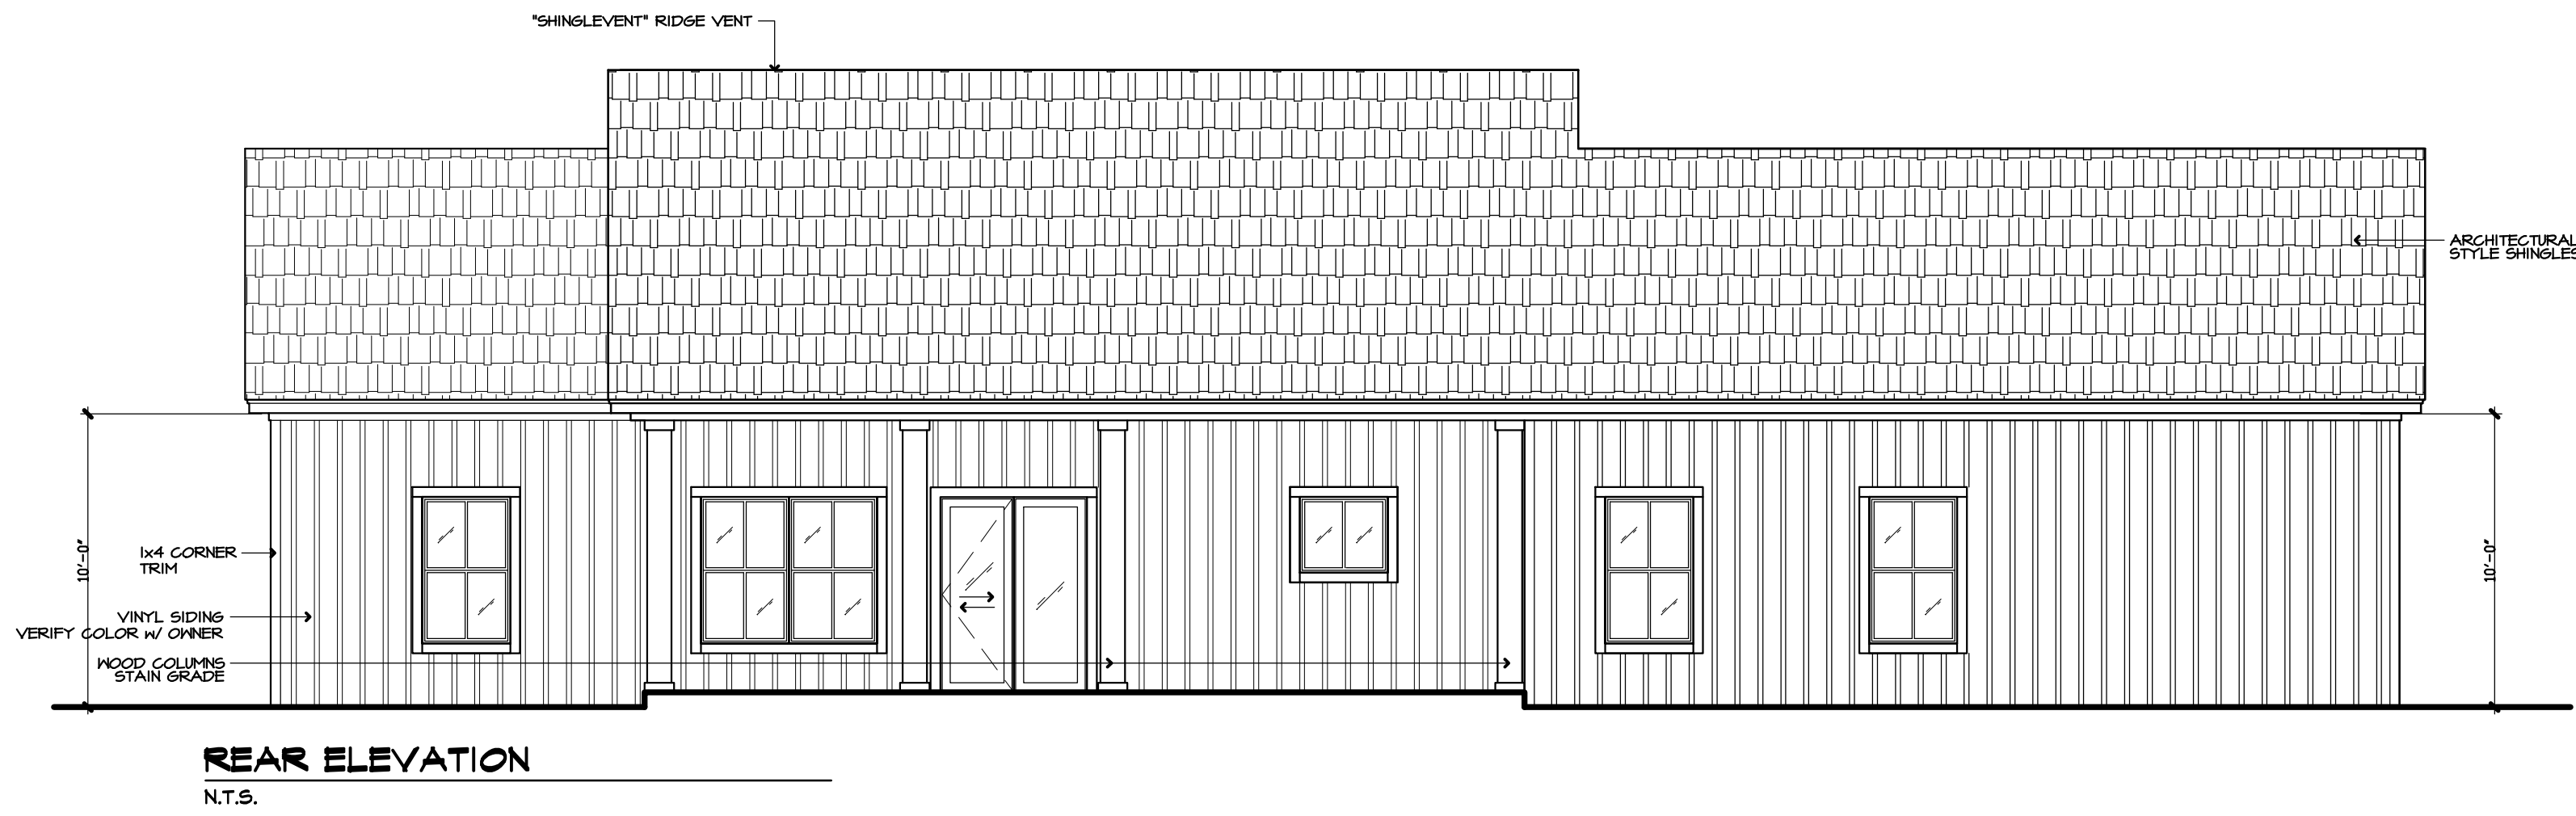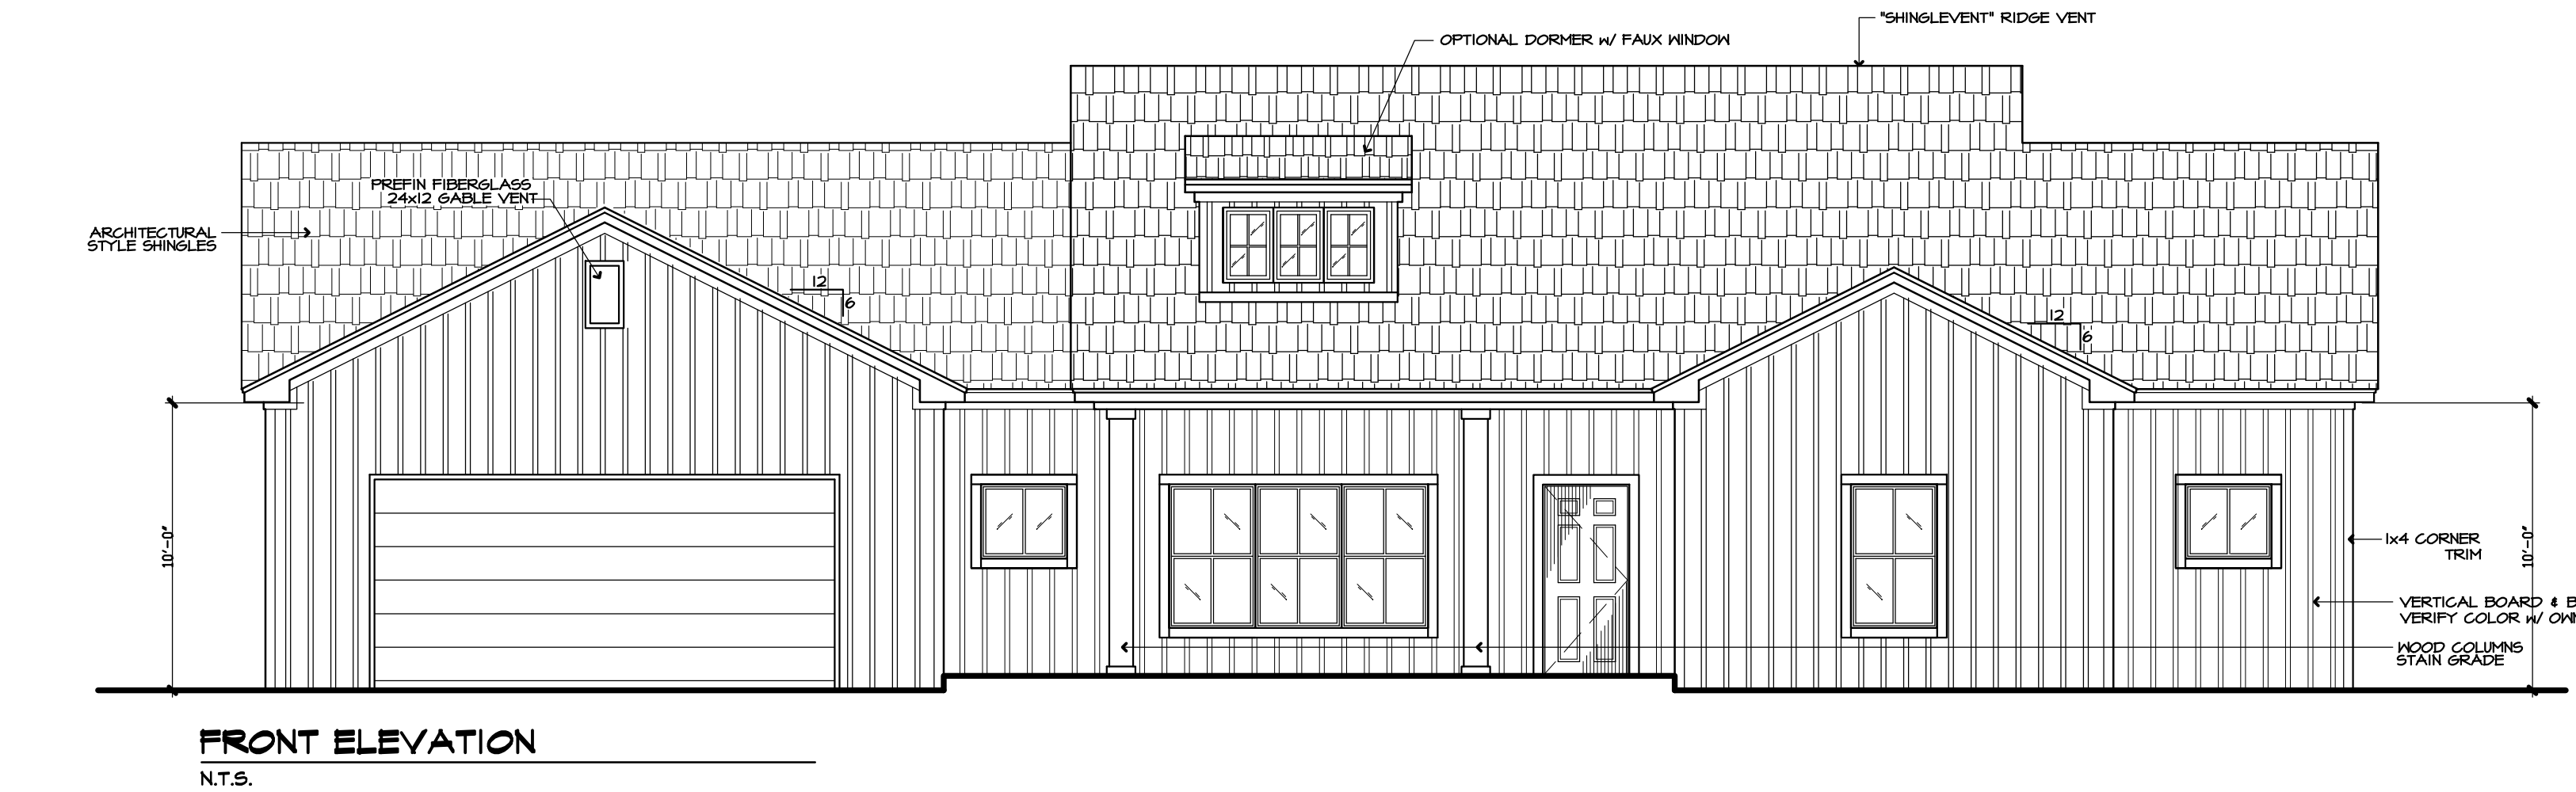


ELEVATION "A"
UTILITY

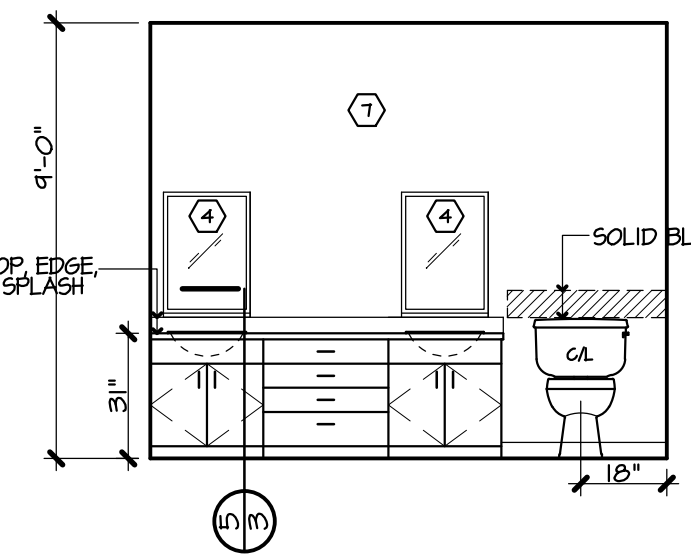

ELEVATION "A"
BATH

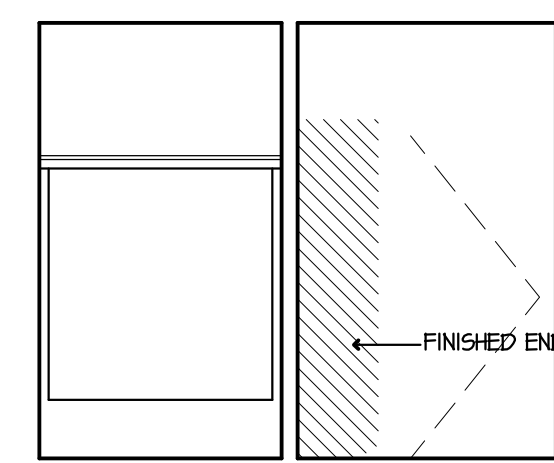


ELEVATION "B"

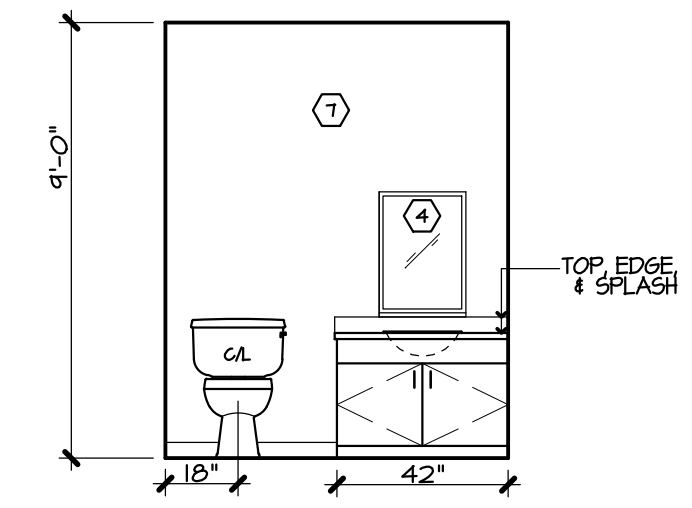


ELEVATION "A"
HALF BATH


GENERAL NOTES INTERIOR ELEVATIONS			
MARK	DESCRIPTION	MOUNTING REQ.	REMARKS
1	ROBE HOOK	60" ϕ	(1)
2	TISSUE HOLDER	24" ϕ	(1)
3	SHOWER HEAD LOCATION	72" ϕ	
4	MIRROR	VARIES	(1), (2)
5	GYP BD "WRX" PAINTED	XXXXXXXX	(2)
6	WOOD BASE w/ SHOE	XXXXXXXX	
7	CLEAN & CAULK ALL JOINTS @ FIXTURES & TRIM	XXXXXXXX	
8	KITCHEN APPLIANCES STAINLESS STEEL - PROVIDED BY CONTRACTOR		
REMARKS GENERAL NOTES			
(1) ALL ACCESSORIES TO BE SECURED TO SOLID BLOCKING			
(2) "WRX" GYP BD TO BE INSTALLED BEHIND ALL TUBS - SEE INTERIOR ELEVATIONS FOR REFERENCE			

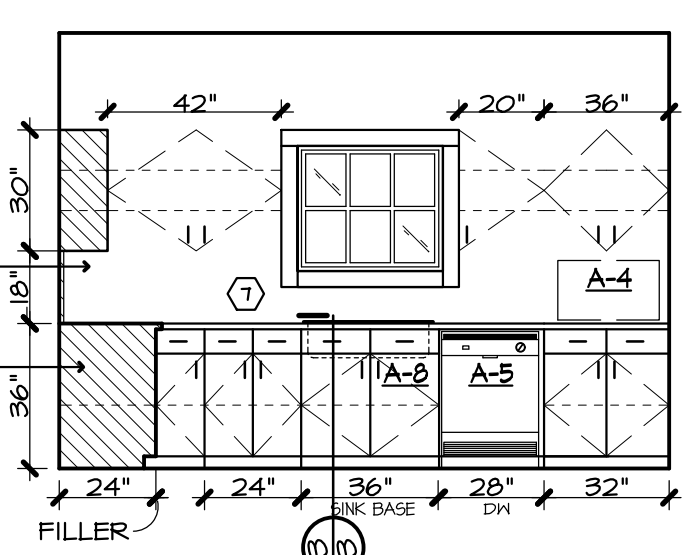

ELEVATION "A"
KITCHEN

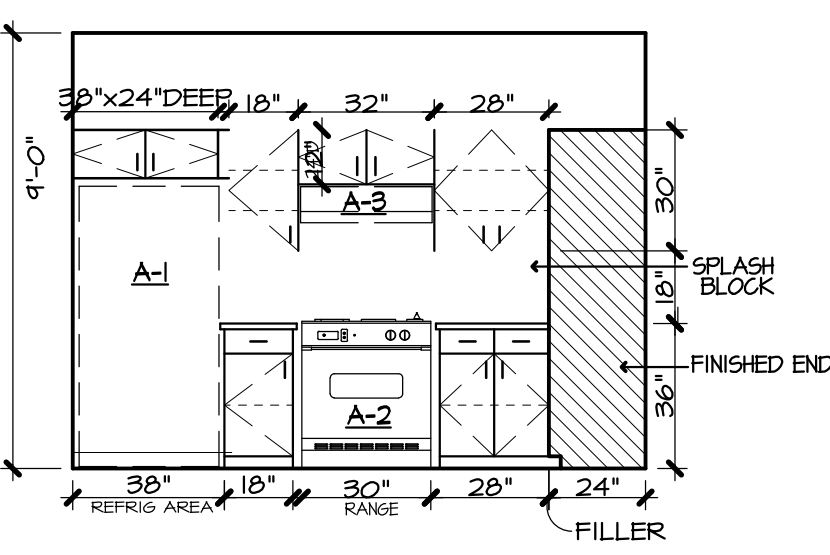


ELEVATION "B"

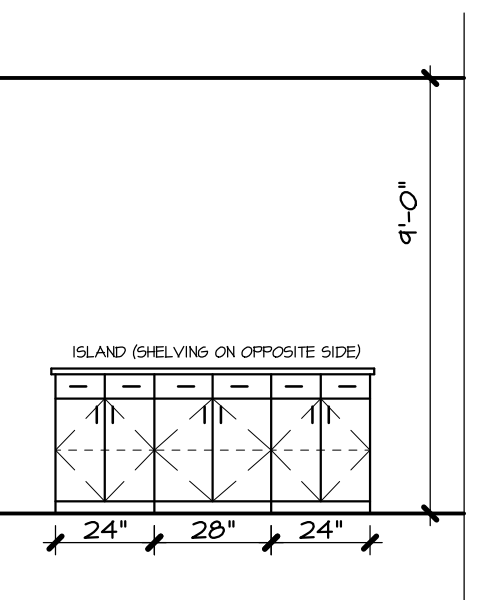

ELEVATION "C"

APPLIANCE SCHEDULE			
MARK	ITEM	DESCRIPTION	REMARKS
A-1	FREEZER / REFRIGERATOR	STAINLESS STEEL - w/ PROVIDE UNDER CONTRACT	(1) (2) (4)
A-2	RANGE	GE AB545DFB5 ARTISTRY SERIES 30" FREE-STANDING ELECTRIC RANGE UP FRONT CONTROLS	(2) (4)
A-3	OVER THE RANGE VENTHOOD	GE/JV 338 HEB 30" STANDARD HOOD, VENTED, w/ LIGHT MTL DUCT (1" DIA) THRU ROOF w/ WATER PROOF CAP & DAMPER INSTALLED BY HVAC CONTRACTOR (SEE INTERIOR ELEVATIONS FOR REF)	(2) (3) (4)
A-4	COUNTER MICROWAVE	GE JES1460DSBB 1.4 CU FT COUNTERTOP MICROWAVE OVEN	(5)
A-5	DISHWASHER	GE GDF520P6JBB DISHWASHER with FRONT CONTROLS	(1) (2) (4)
A-6	WASHING MACHINE	GE GFWH1200H FRONTLOAD 3.6 DOE IEC CUFT. ENERGY STAR	(5)
A-7	CLOTHES DRYER	GE GFEDN120ED FRONTLOAD 7.0 CUFT. - DUCT (4" DIA) MAX 35' w/ 3 90° BENDS	(1)
A-8	DISPOSER	GE GFC525V 1/2 HP CONT FEED GARBAGE DISPOSAL - CORDED	(5)
REMARKS APPLIANCE SCHEDULE			
(1) ENERGY STAR CERTIFIED			
(2) ADA COMPLIANT APPLIANCE			
(3) SWITCH HOOD TO ROCKER SWITCHES MOUNTED ON FACE OF CABINET FOR ADA COMPLIANCE, LIGHTING & VENT			
(4) ALL KITCHEN APPLIANCES SPECIFIED AS "STAINLESS STEEL"			
(5) PROVIDED & INSTALLED BY PLUMBING CONTRACTOR - SEE PLUMBING FIXTURE SCHEDULE FOR REF			

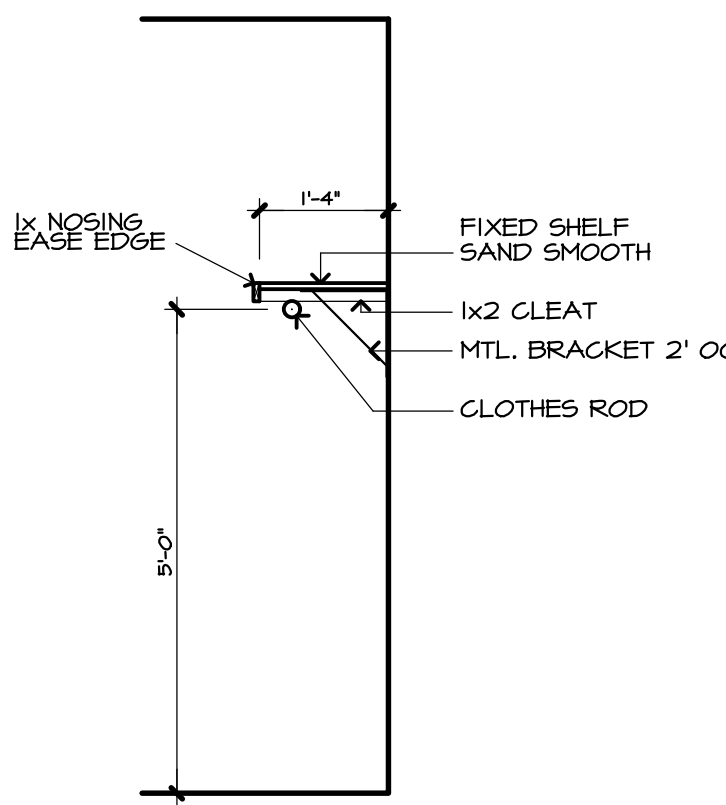

7
3
1/2"


EXTERIOR & INTERIOR ELEVATIONS

RIVER BACK ESTATES

COMM. NO. 45432
DATE: 07/09/2022
FILE:


MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com



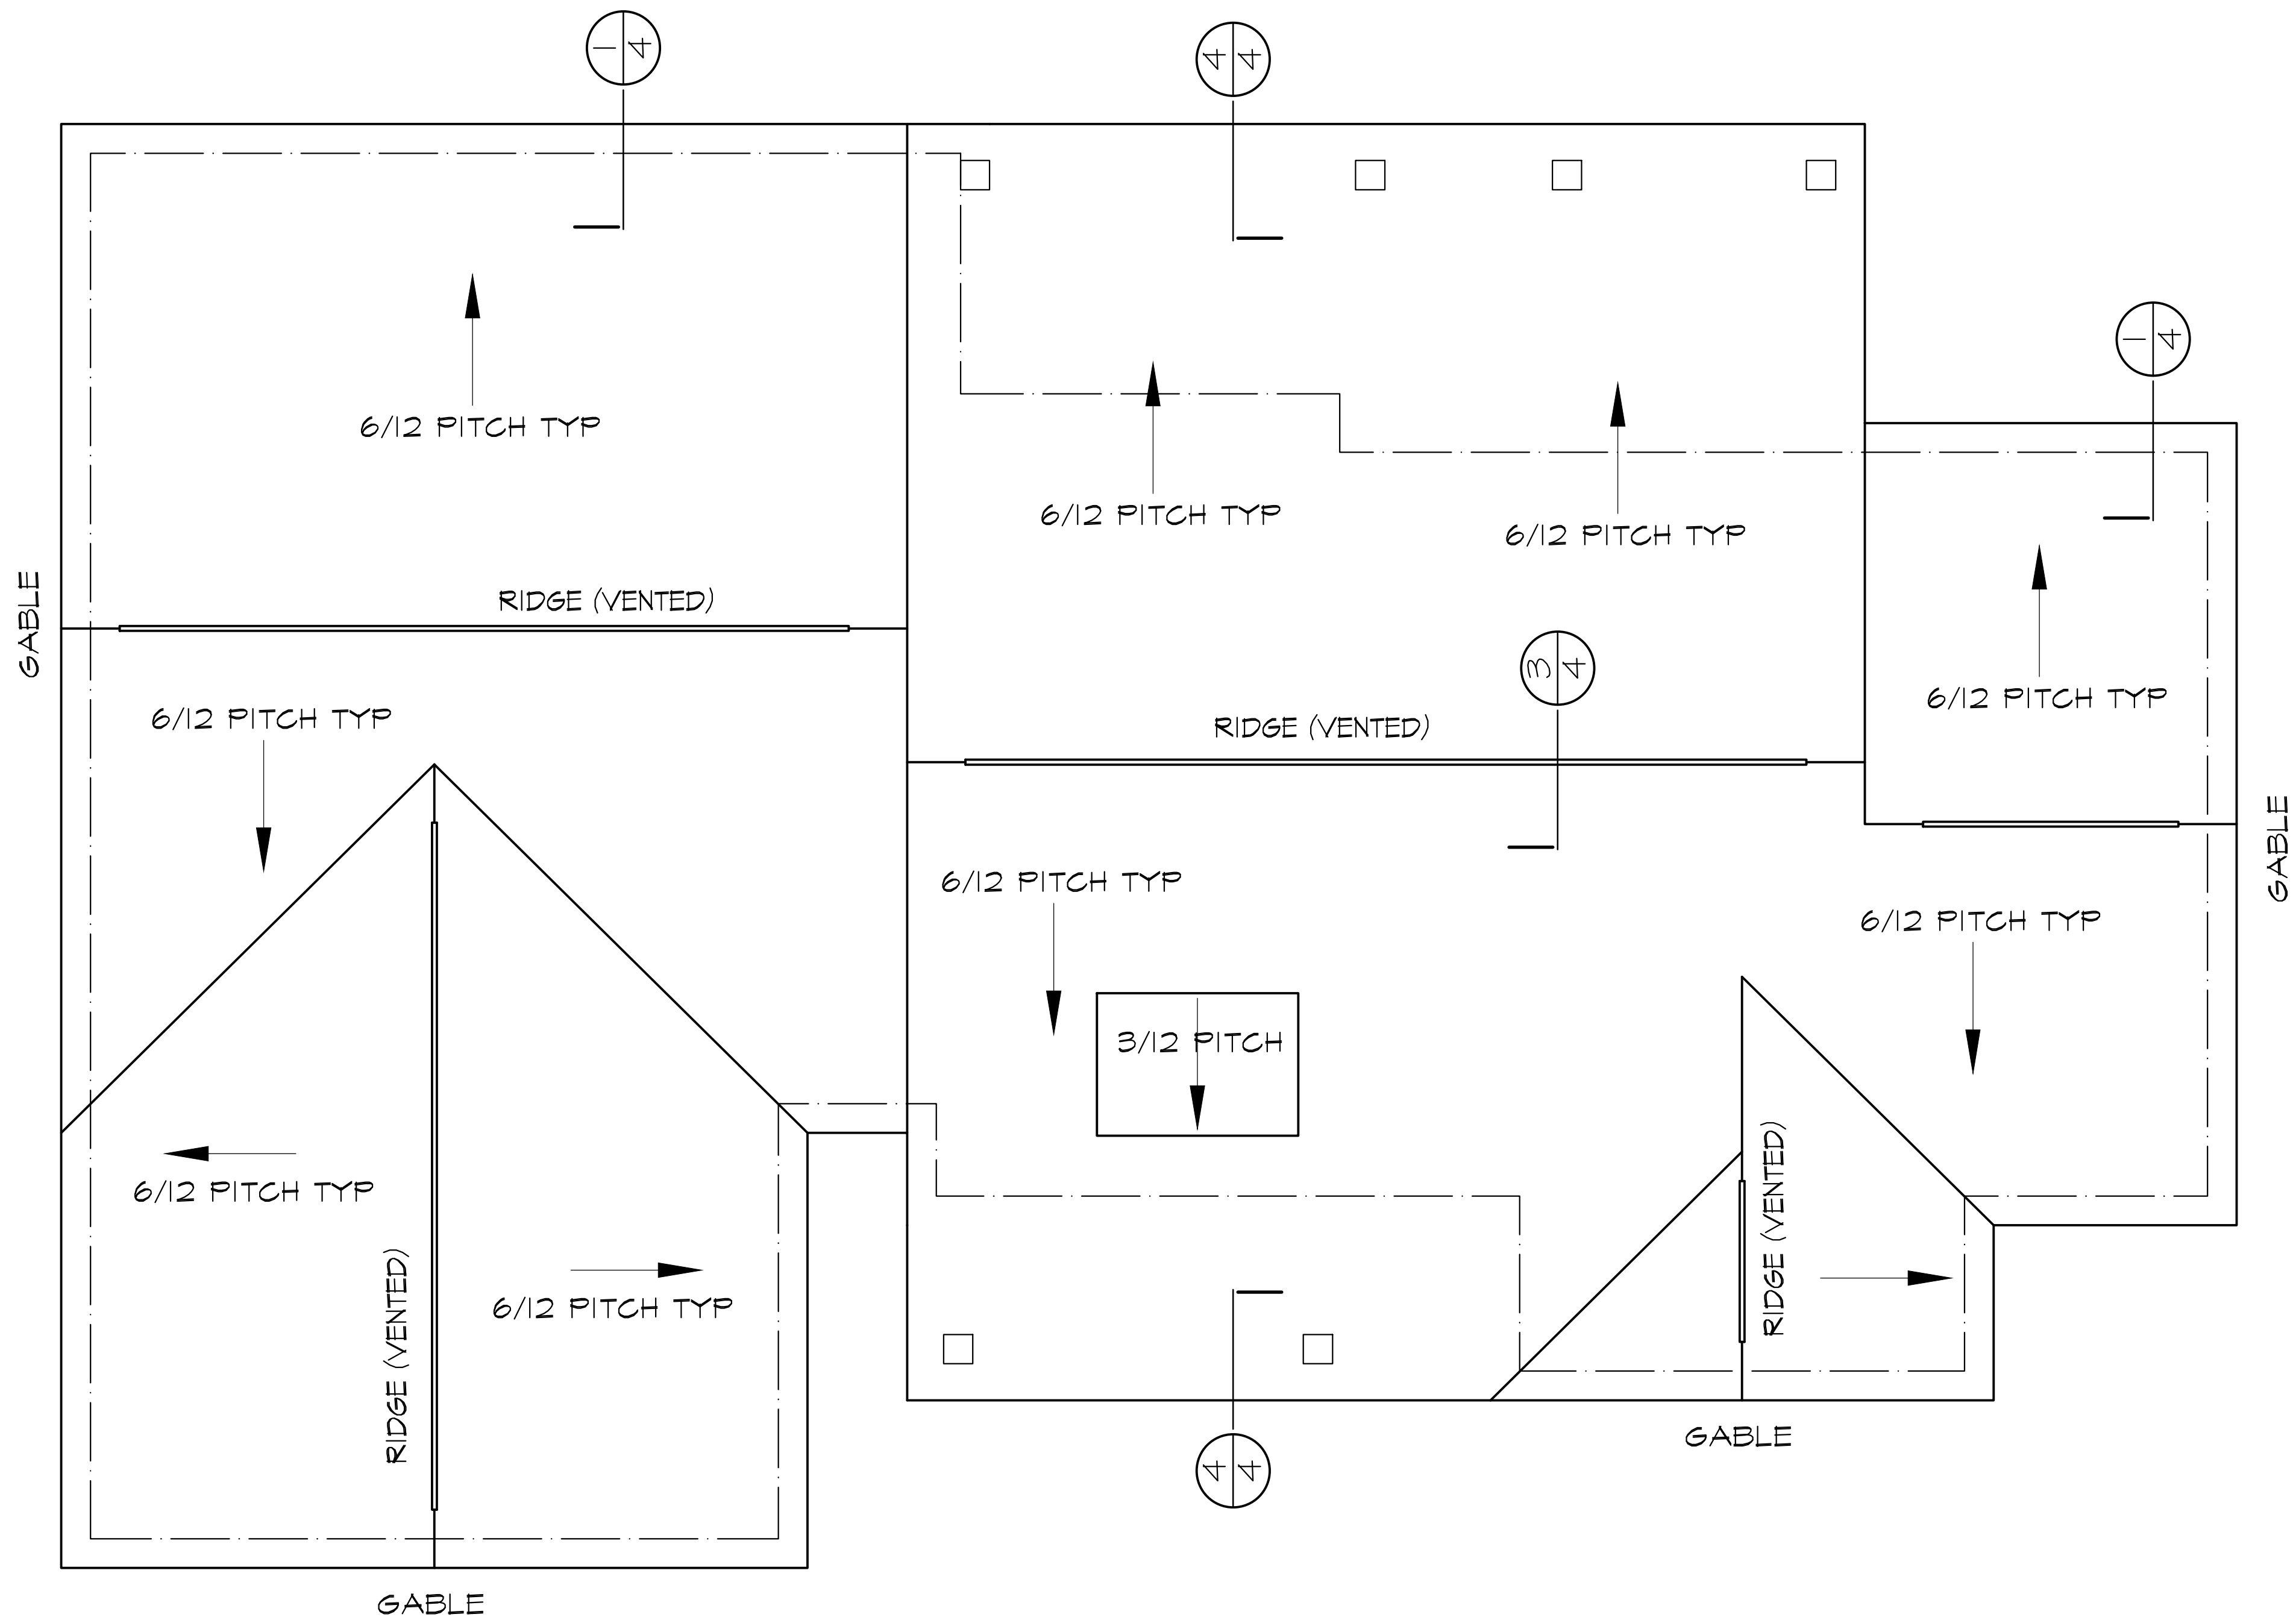

ROOF PLAN

1/4"




ROOF PLAN




MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

COMM. NO.: 45422
DATE: 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com

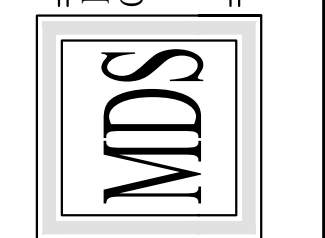


4.2

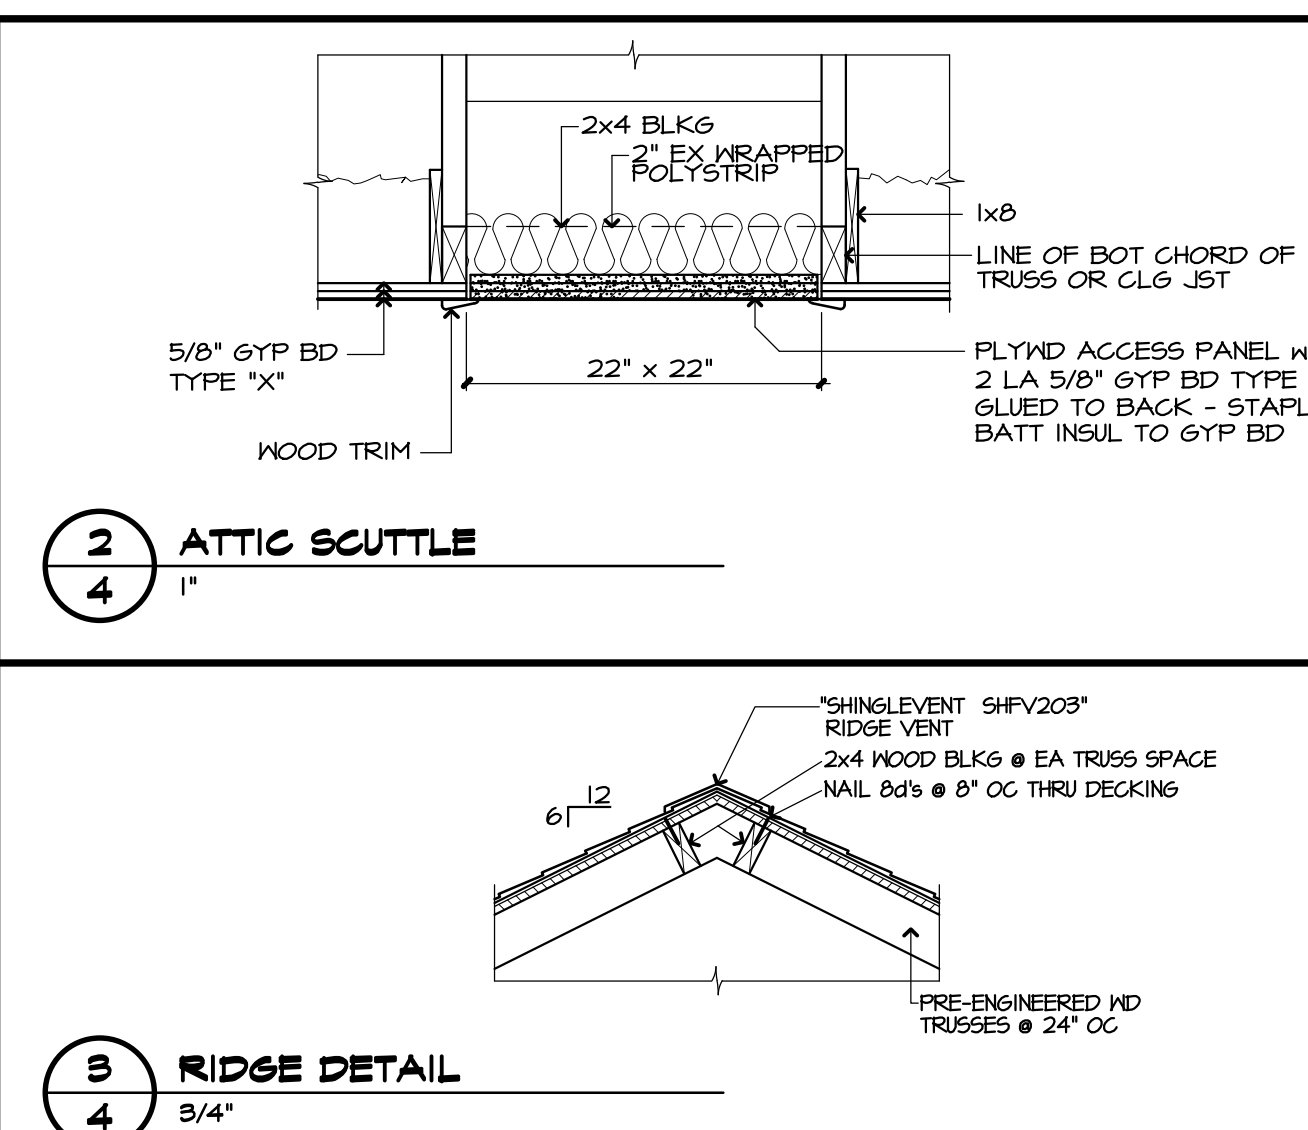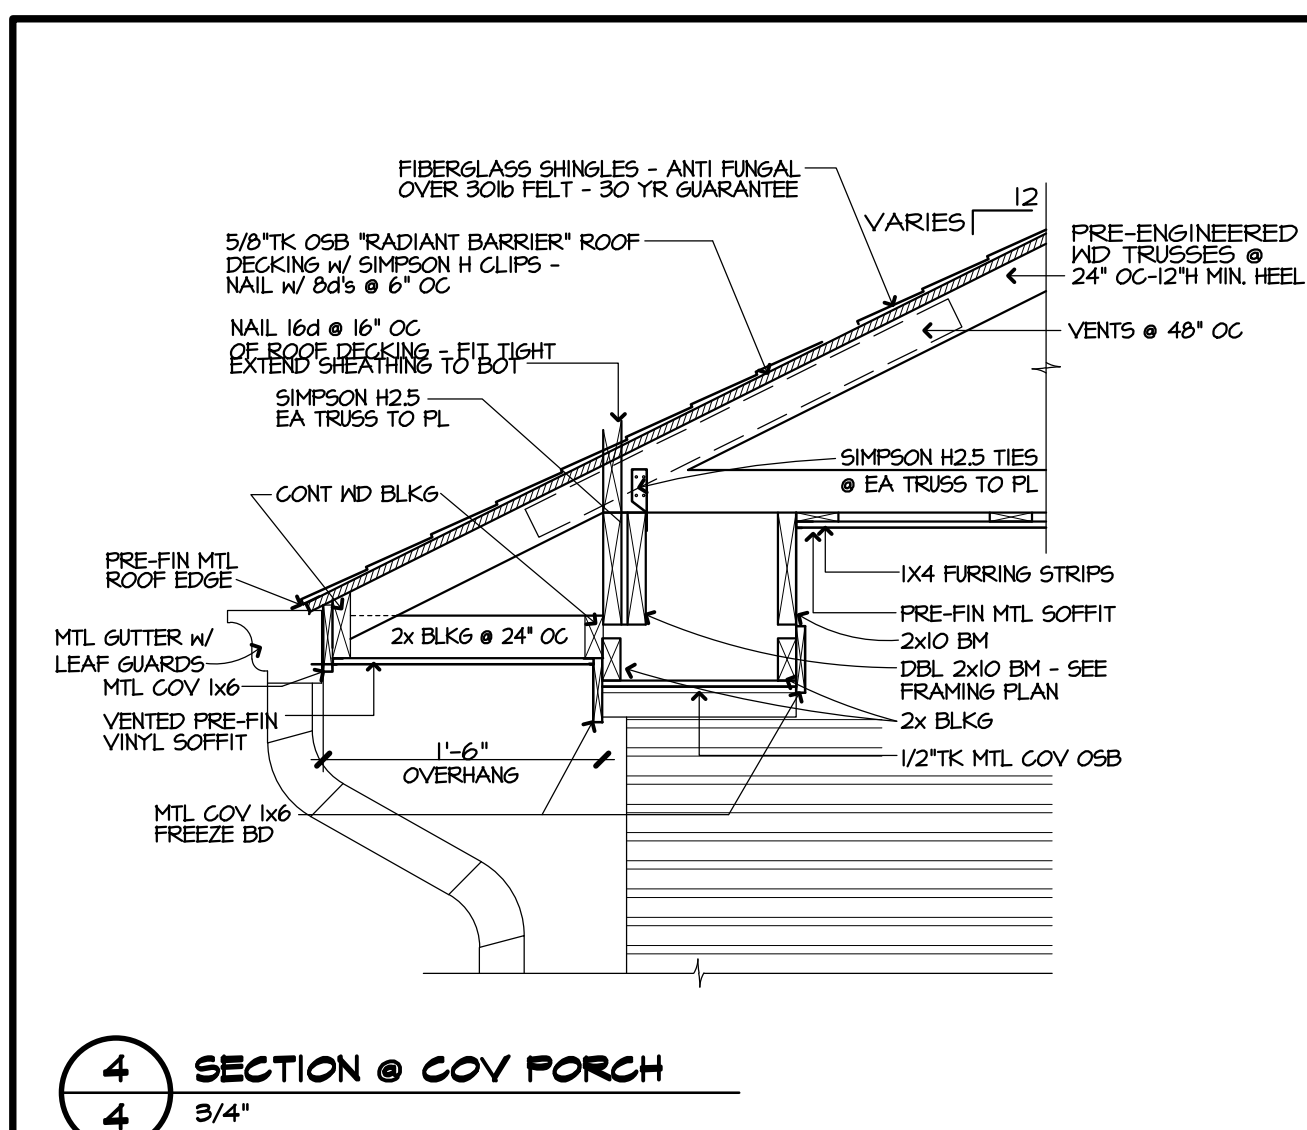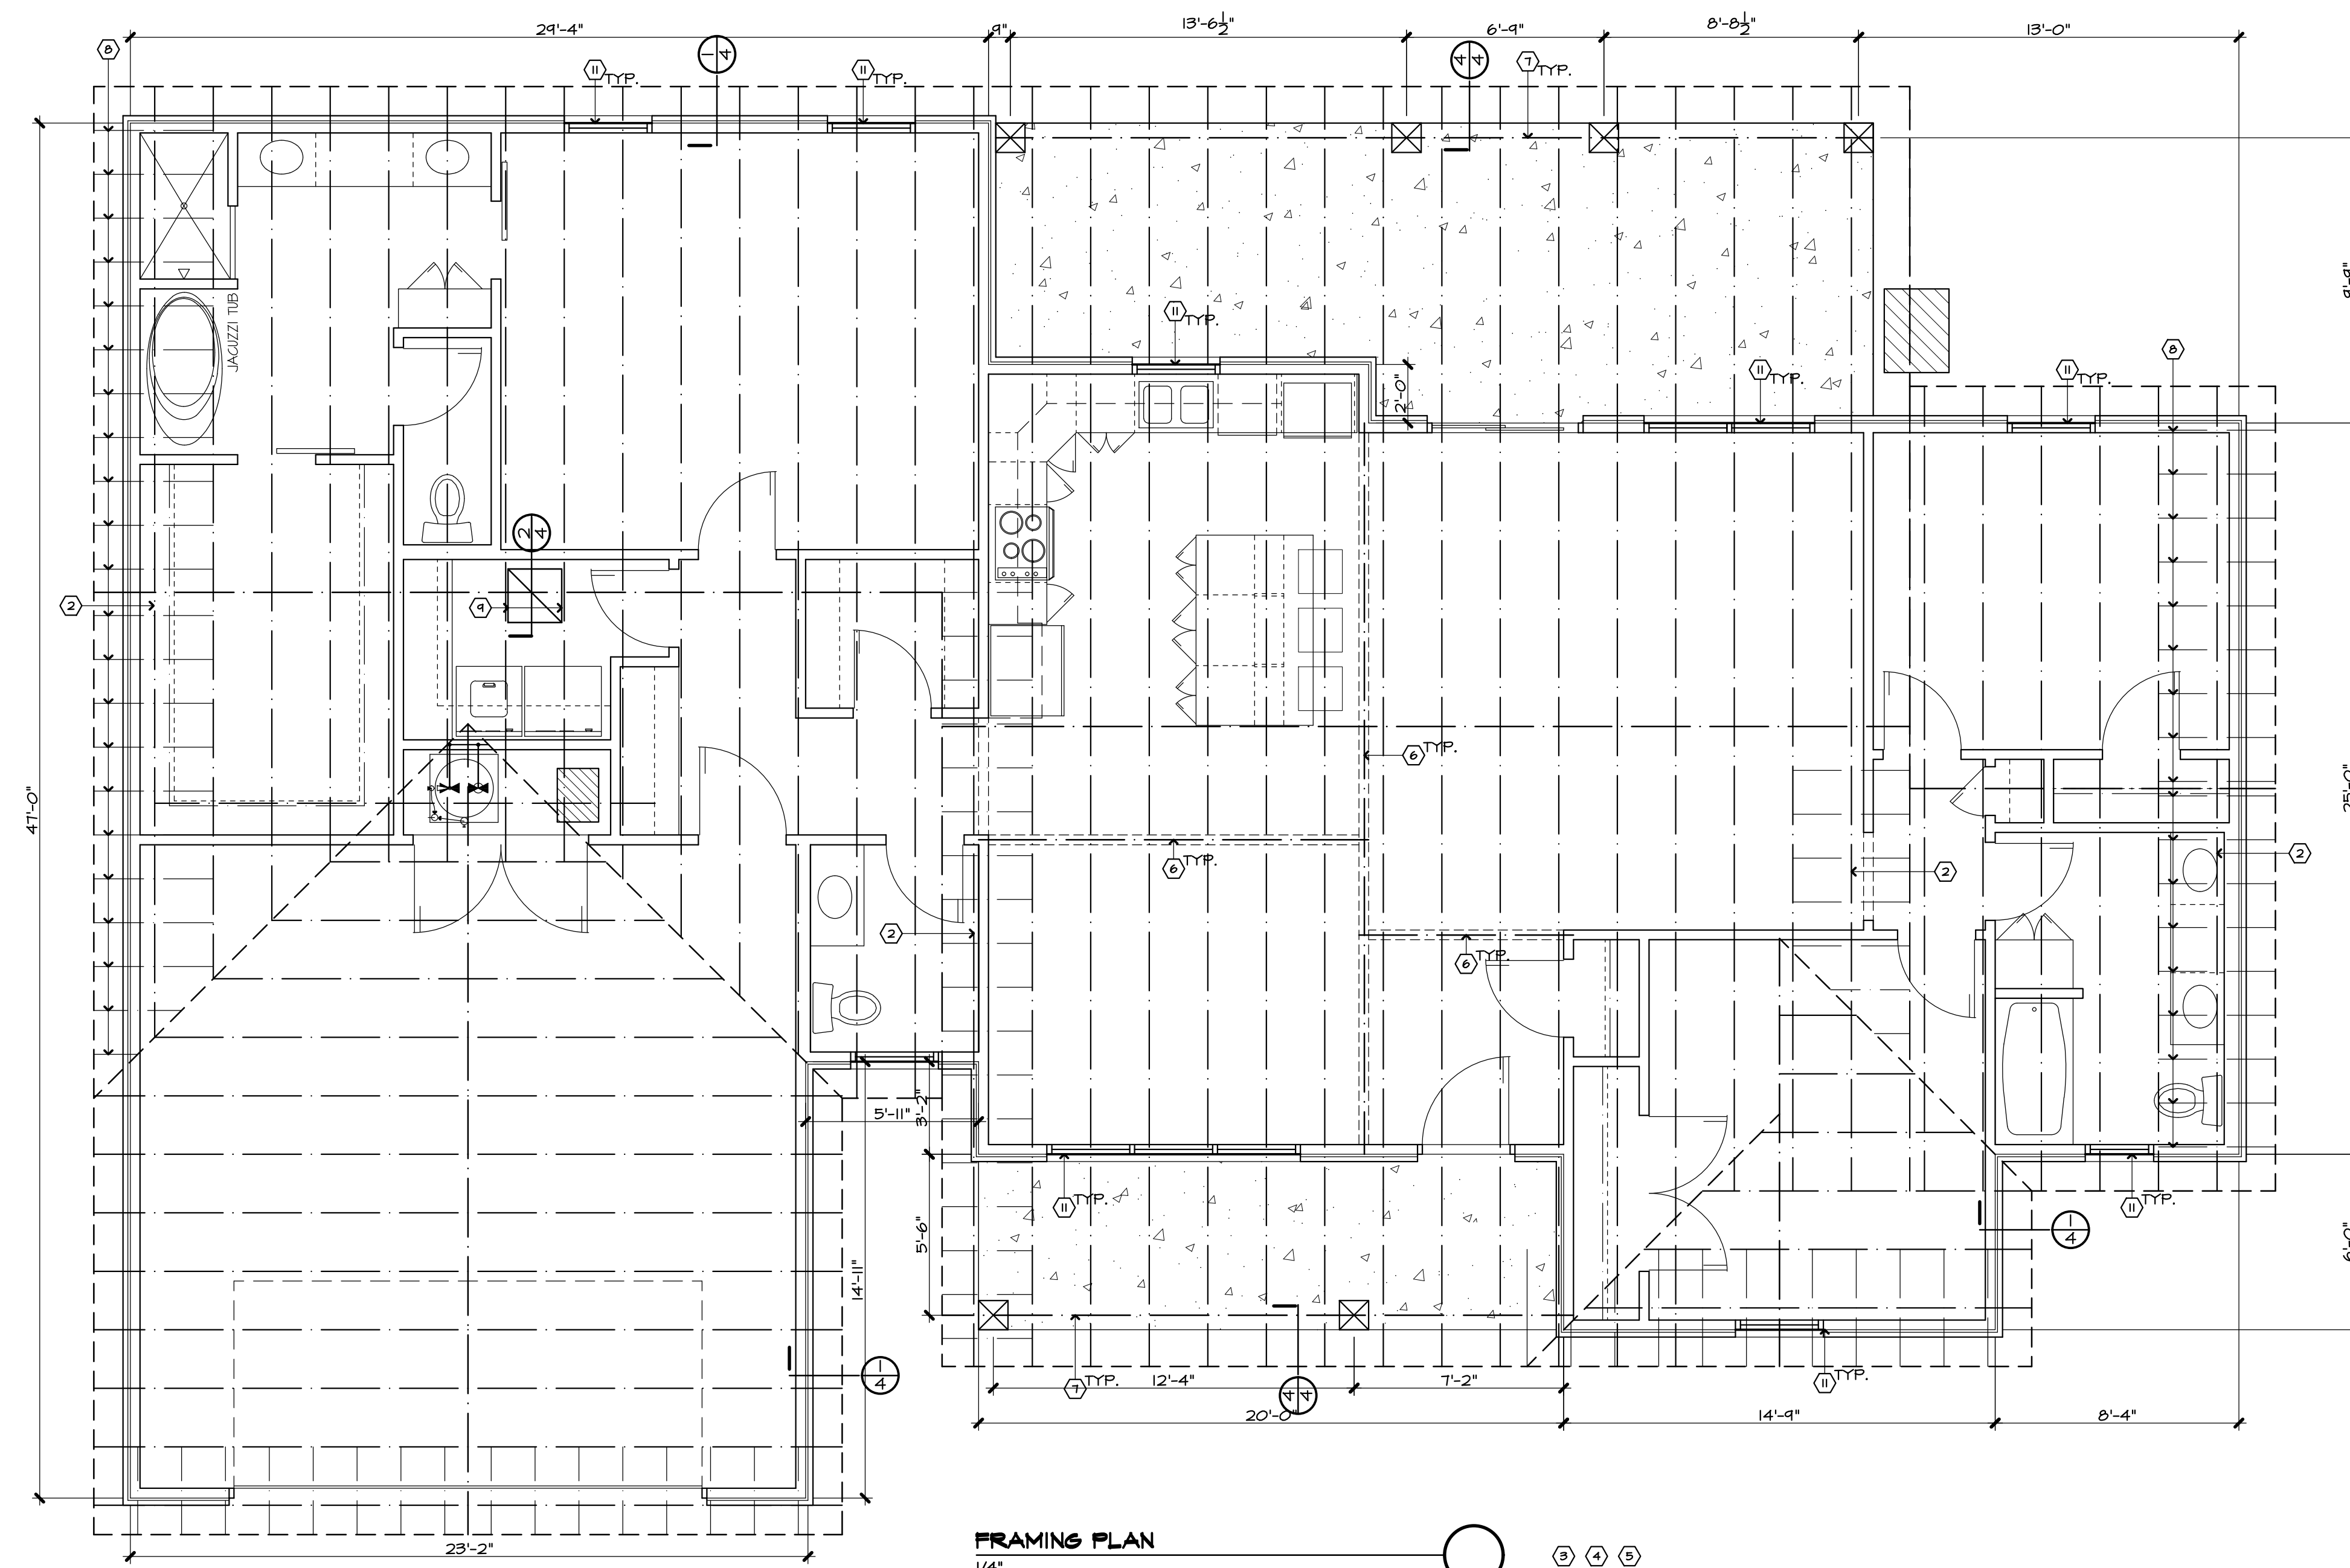

O	GENERAL NOTES	FRAMING PLANS
MARK	DESCRIPTION	
1	PRE-ENGINEERED WOOD TRUSSES @ 24" OC	
2	PROVIDE GABLE TRUSS THIS LOC'S - SEE EXTERIOR ELEVATIONS	
3	SEE TRUSS SHOP DRAWINGS FOR CONT WEB BRACE MEMBER SIZE, LOCATION, AND REQ'D FASTENERS. LAP SPLICE GROSS AT LEAST 2 TRUSSES	
4	PROVIDE FOR CONTINUOUS PERMANENT LATERAL WEB BRACING AS REQ'D BY TRUSS SUPPLIER - CONTRACTOR SHALL INSTALL CONT WEB BRACING AS NOTED ON TRUSS SUPPLIER'S SHOP DRAWINGS	
5	1 - 2x4 PERMANENT 45 DIAGONAL BRACE IN PLANE OF WEB MEMBERS NAILED TO OPPOSITE SIDE OF TRUSS WEB MEMBER APPROX 20'-0" INTERVALS	
6	3/8"x13/4" 6LUE LAM BM	
7	PORCH BEAM - (2) 2x10's w/ 1/2"TK PLYWOOD BETWEEN	
8	2x4 OUTRIGGERS @ 2'-0" OC	
9	ATTIC SCUTTLE - SEE DETAIL FOR REF	
10	DOOR HEADER - SEE LINTEL SCHEDULE	
11	WINDOW HEADER - SEE LINTEL SCHEDULE	
12	PROVIDE SOLID BLKG IN WALL FOR HDPC BARS & T.V. MOUNTS	

- TRUSS NOTES**
- 1 ALL ROOF TRUSSES SHALL BE DESIGNED BY THE FABRICATOR TO SUPPORT 10 PSF DEAD LOAD ON TOP CHORD AND 10 PSF DEAD LOAD ON BOTTOM CHORD, PLUS 20 PSF LIVE LOAD ON TOP CHORD PLUS 10 PSF LIVE LOAD ON BOTTOM CHORD, PLUS CODE WIND LOAD.
 - 2 FABRICATOR SHALL SUBMIT CALCULATIONS WHOSE DRAWINGS STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF ARKANSAS TO THE ARCHITECT FOR REVIEW PRIOR TO FABRICATION OF TRUSSES.
 - 3 CONTRACTOR SHALL PROVIDE BRACING FOR TRUSS CHORD AND WEB MEMBERS AS REQUIRED BY THE TRUSS FABRICATOR. SYSTEM IS NOT STABLE UNTIL SHEATHING AND PERMANENT BRACING ARE INSTALLED.
 - 4 NUMBER 3 GRADE LUMBER WILL NOT BE ALLOWED FOR CHORDS OR TENSION WEB MEMBERS
 - 5 MINIMUM TRUSS PLATE SIZE SHALL BE 3"x5" (OR 4"x4") EA SIDE OF TRUSS @ ALL JOINTS
 - 6 MINIMUM CONTACT AREAS FOR TRUSS PLATES SHALL BE 3.75 SQUARE INCHES ON EA MEMBER @ ALL JOINTS, EA SIDE OF TRUSS
- NAILING, BEAM, AND COLUMN NOTES**
- 1 PLYWOOD FOR ROOF SHALL BE 5/8" OSB BRD. NAILING FOR PLYWOOD ROOF DECKING SHALL BE 2d COMMON NAILS @ 6" CENTER @ FABRICATED PLYWOOD EDGES AND 8d NAILS @ 6" ON CENTER ALONG ALL INTERMEDIATE SUPPORTS
 - 2 WALL SHEATHING SHALL CONSIST OF 5/8" OSB BRD. NAILING FOR WALL SHEATHING SHALL BE 8d NAILS @ 6" ON CENTER ALONG PLYWOOD EDGES AND 6" ON CENTER ALONG INTERMEDIATE MEMBERS. BLOCK ALL PLYWOOD EDGES.
 - 3 NAILS FOR ALL FRAMING CONNECTORS SHALL BE FURNISHED BY CONNECTOR MANUFACTURER NAIL PER SCHEDULE FURNISHED BY CONNECTOR MANUFACTURER


LINTEL SCHEDULE				
WALL TYPE	UP TO 4'-0" OPENING	4'-1" TO 6'-0" OPENING	6'-1" TO 8'-0" OPENING	8'-1" TO 10'-0" OPENING
4" VENEER	232x32x4	25x32x6 (LLV)	26x32x6 (LLV)	27x42x6 (LLV)

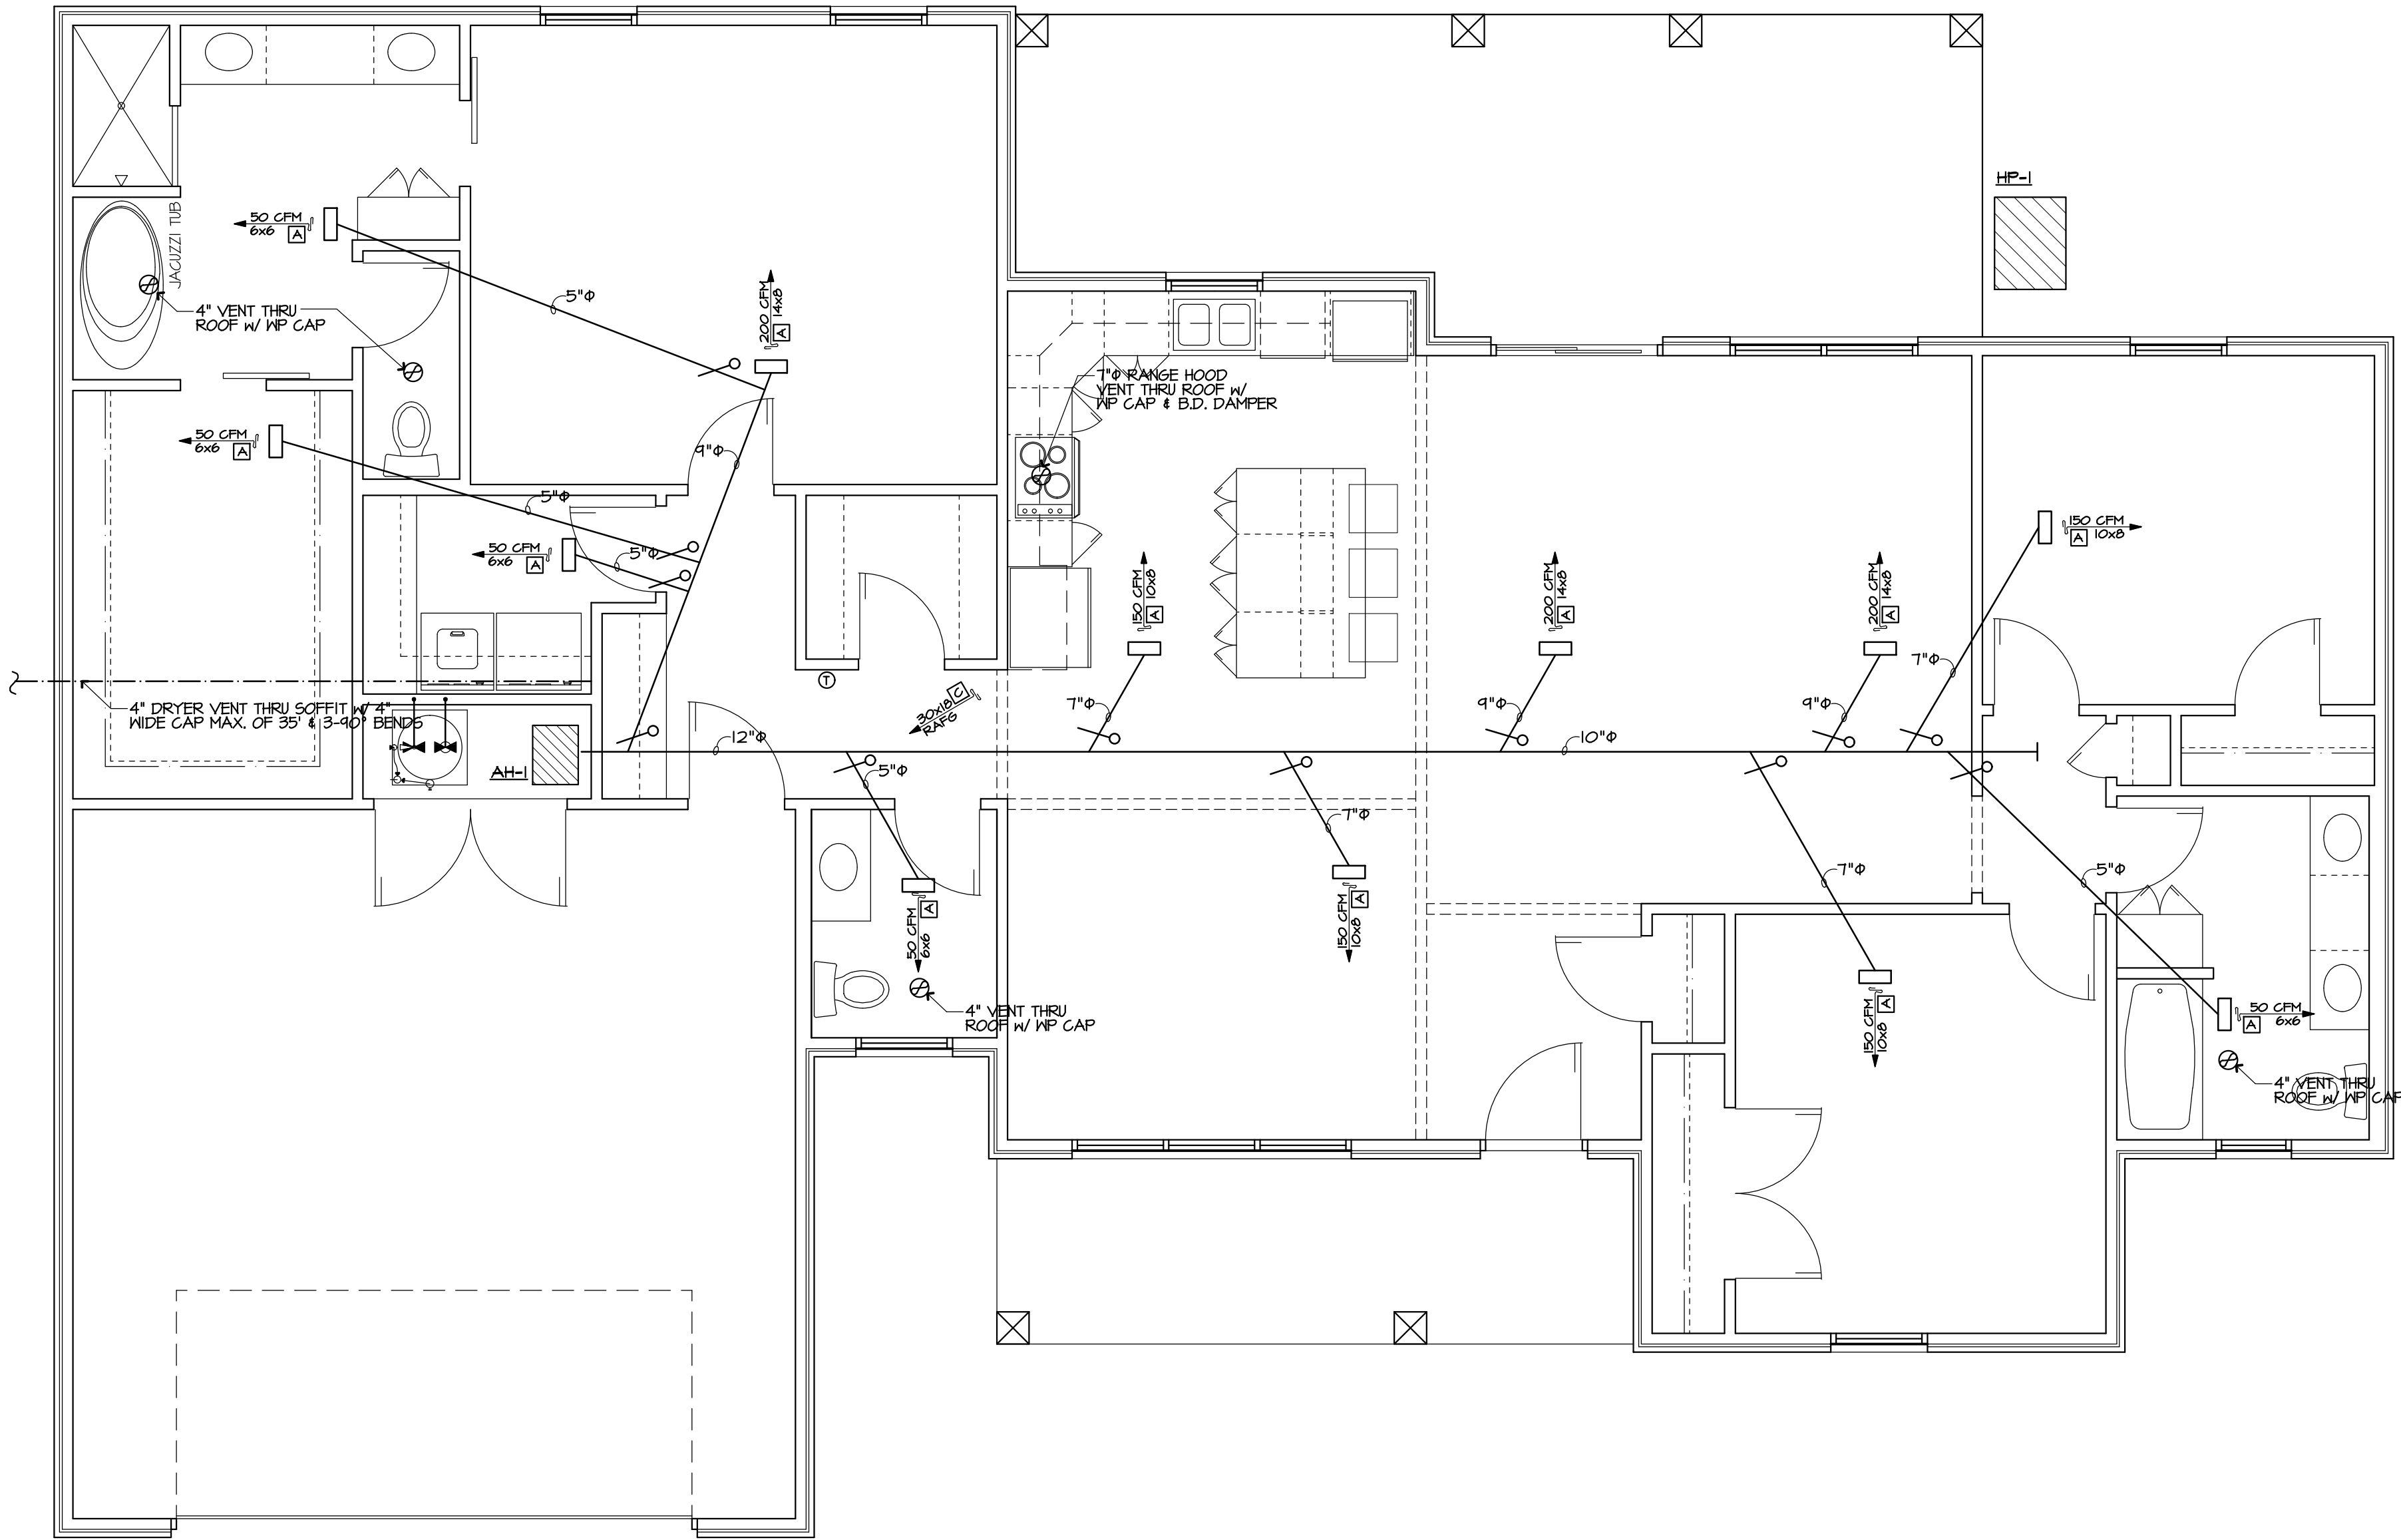

HVAC PLAN
1/4"
SQUARE FOOTAGE H&C: 1,154
SQUARE FOOTAGE TOTAL: 2,470

H.V.A.C. EQUIPMENT SCHEDULE				
MARK	ITEM	DESCRIPTION	CAPACITY	REMARKS
HP-1	HEAT PUMP	MRCOOL UNIVERSAL MDU18024036	36,000 BTUH NOMINAL	15 SEER
AH-1	AIR HANDLER & COIL	MRCOOL UNIVERSAL MDU18024036	15 KW RES.HT 1200 CFM	3 TON COIL
⌂	SUPPLY REG	HART & COOLEY A303	SEE DRAWING	WHITE FINISH
⌂	RET AIR FILTER GRILLE	HART & COOLEY 613	SEE DRAWING	WHITE FINISH
Ⓢ	THERMOSTAT	WHITE ROGERS IF8MEZ-0251	HEATING/COOLING 2 STAGE HEAT \ 1 STAGE COOL 3 TEMP PRE SETS	44" MT& HT
Ⓢ	VENT FAN			VENT THRU ROOF

SCREEN ALL JOINTS W/3 SCREWS MIN ON ROUND DUCT. STD LOCK SEAM ON RECT DUCT. SEAL ALL DUCT JOINTS & CONNECTIONS @ REGISTERS, PLENUMS, SUPPLIES, & RETURNS W/DUCT MASTIC IRONGRIP 601 OR HARDCAST DT-IMPREGNATED FIBER TAPE W/ RTA-50 ADHESIVE. FOIL TAPE OR DUCT TAPE WILL NOT BE ACCEPTED.

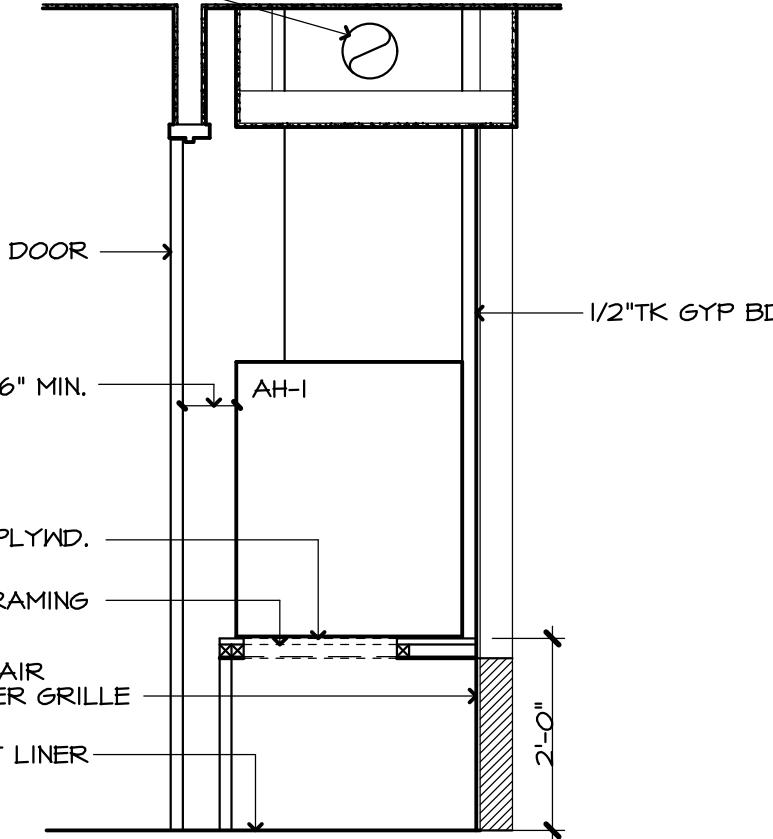

1 TYP MECH CLO
5 1/2"

HVAC PLAN
NOTES, DETAILS, AND SCHEDULES


MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

COMM. NO. 45422
DATE : 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com

MDS


UT

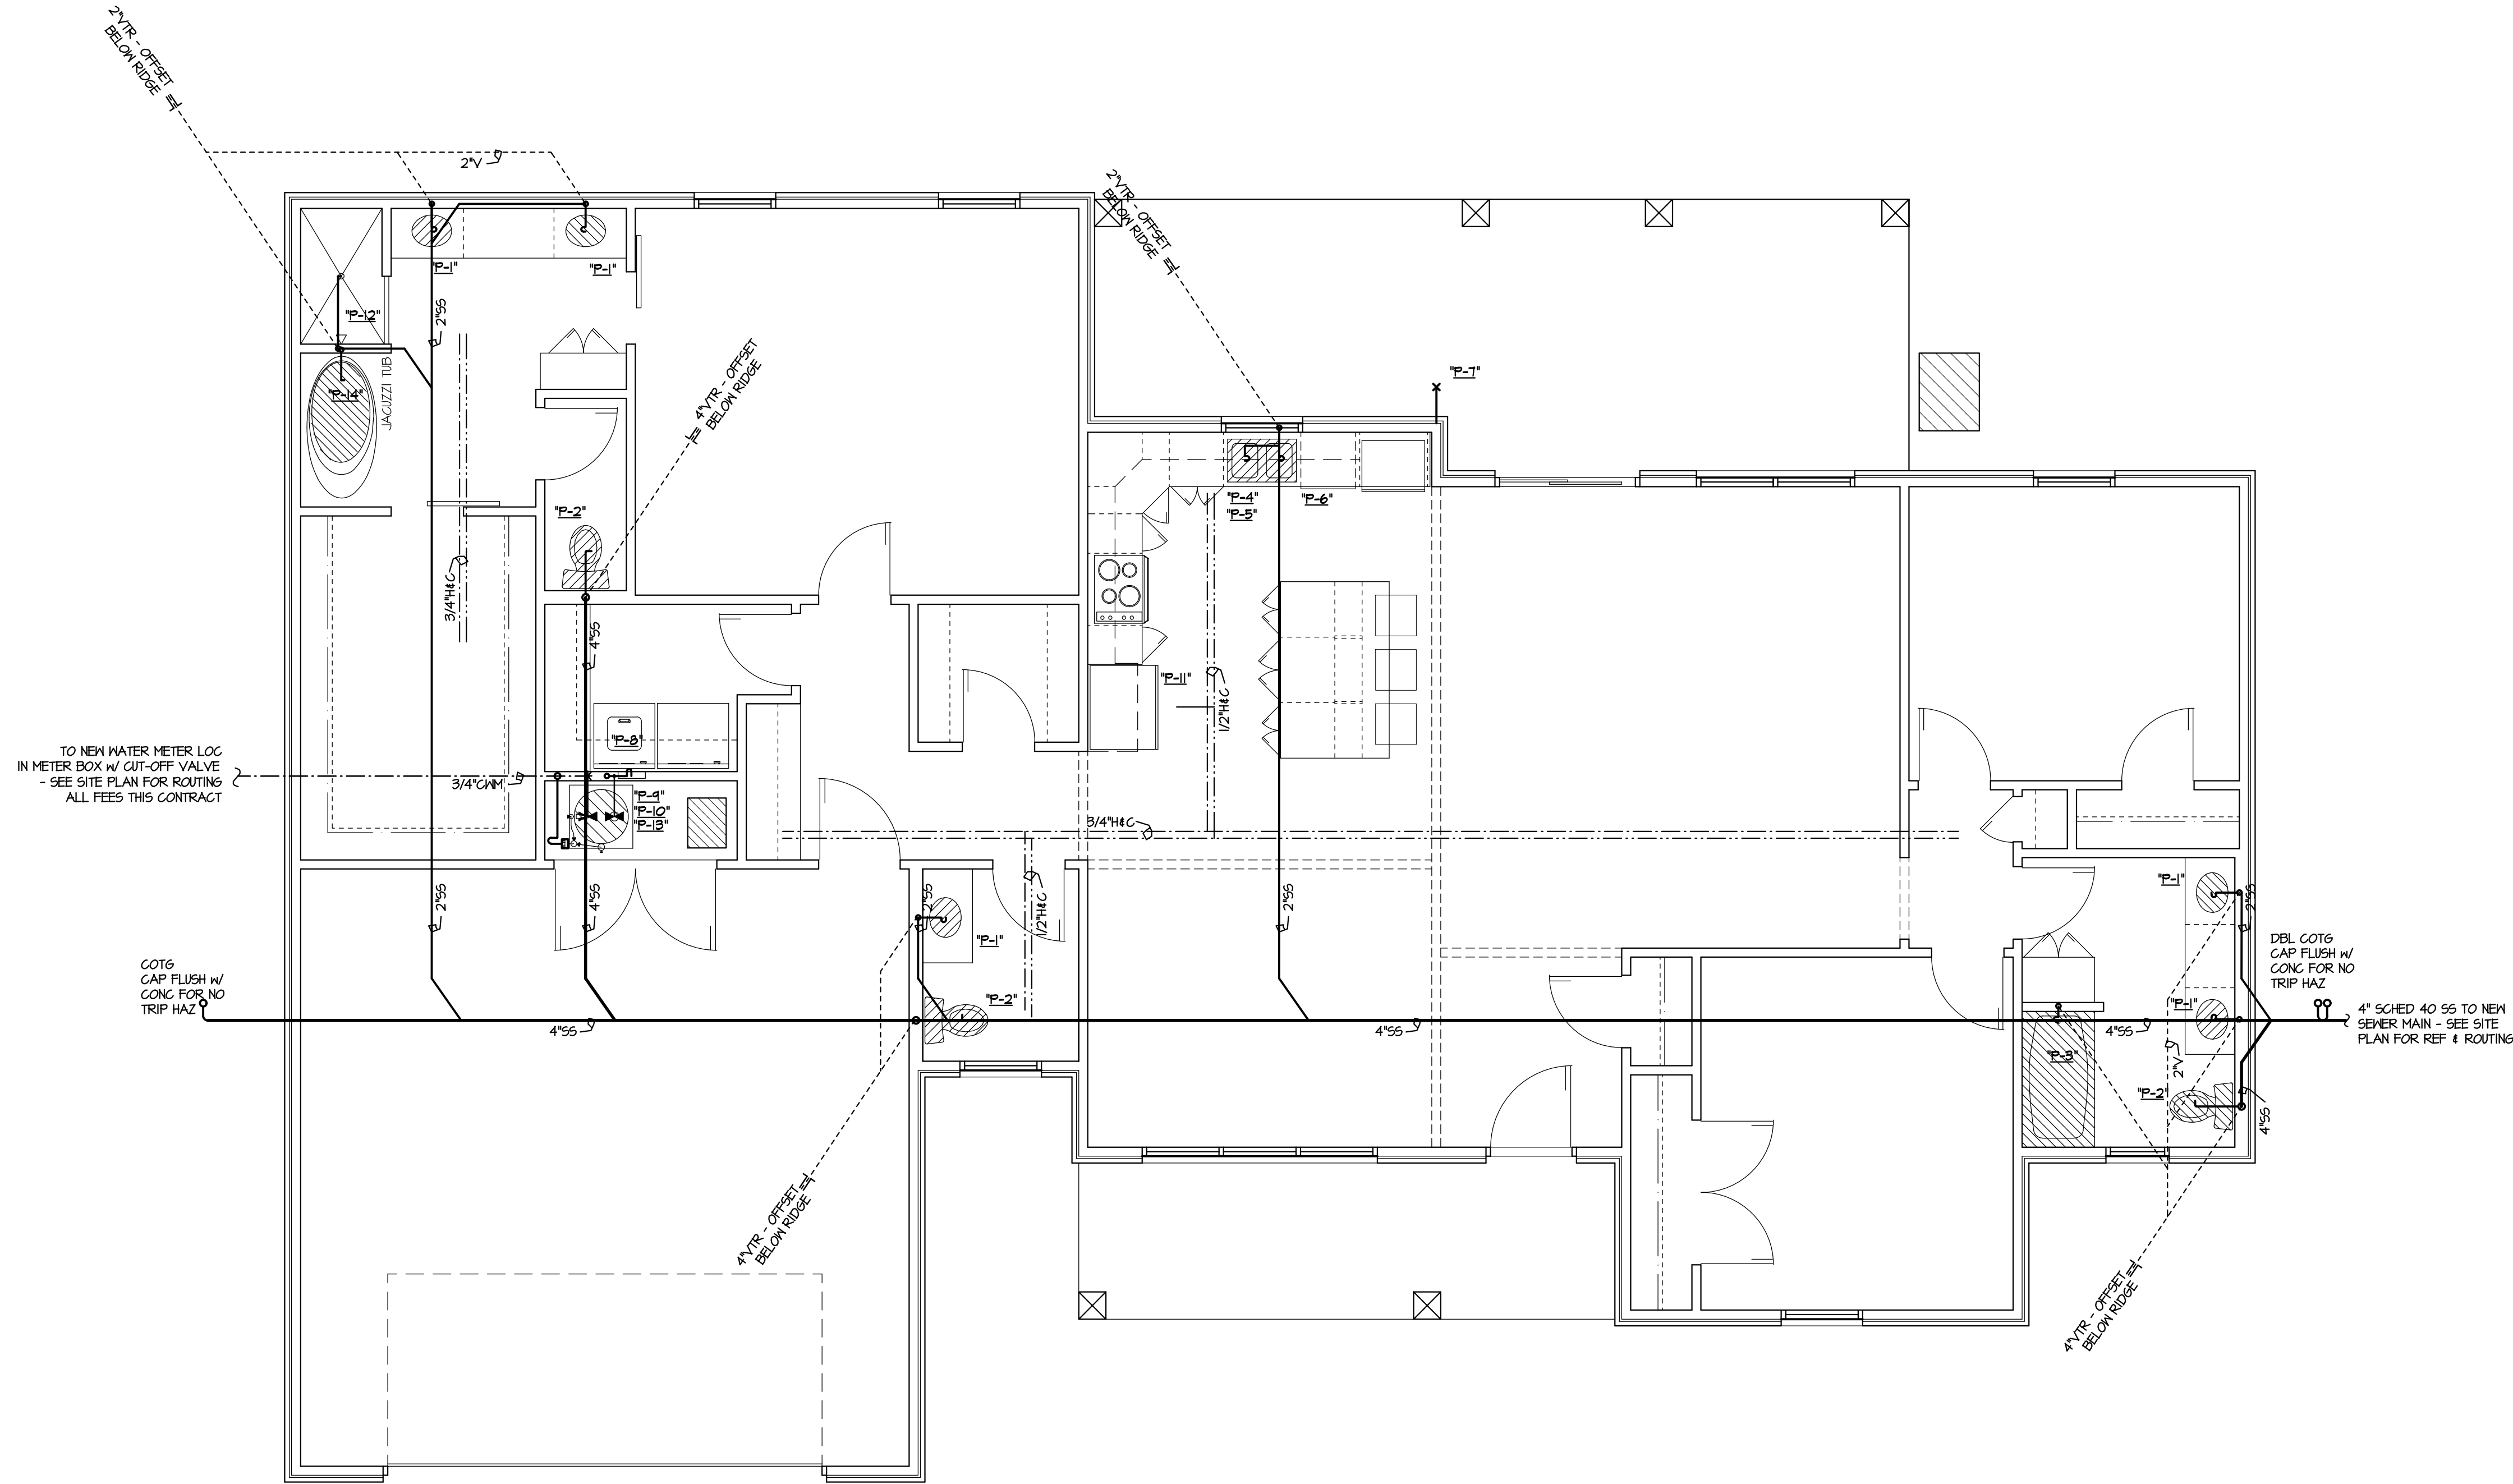

PLUMBING PLAN
1/4"

PLUMBING FIXTURE SCHEDULE			
FIXTURE FINISHES VERIFY W/ OWNER			
MARK	ITEM	DESCRIPTION	REMARKS
P-1	LAVATORY	22x31 (3 BR) 22x31 (2 BR) MARBLE TOP & INTEGRATED BOWL WITH CHICAGO 420-ABCP FAUCET	(2)
P-2	WATER CLOSET	GERBER MAXNELL 21-112 WITH GLAZED WOOD SEAT	(1), (3)
P-3	TUB / SHOWER	AKER OPTS-6032 W/ FACTORY INSTALLED ROD & CURTAIN DELTA T13420-FD505 FAUCET	(1), (4)
P-4	SS SINK	DAYTON D-23322-4 SS SINK W/ CHICAGO 432ABCP FAUCET & SPRAY DEARBORN BRASS 11 STRAINER	
P-5	DISPOSAL	6E 6FC525V 1/2 HP CONT FEED GARBAGE DISPOSAL - CORDED	(5)
P-6	DISHWASHER CONNECTION	INSTALLED BY PLUMBING CONTRACTOR	
P-7	HOSE BIBB	WOODFORD MODEL 25P AUTOMATIC DRAINING FREEZELESS WALL FAUCET	
P-8	WASHING MACH CONNECTION	OATEY 38751 W/ NIBCO #14 VALVES	
P-9	WATER HEATER	AO SMITH ELEC 40 GAL ELEC WATER HEATER INCLUDE PRE-MFG STAND & DRAIN PAN	(6)
P-10	HUB DRAIN	2" PROSET TRAP GUARD HUB DRAIN W/ MADE 2440 FIXED AIR GAP MOUNTED @ TOP OF DRAIN	(7)
P-11	ICE MAKER CONNECTION	OATEY 1.M.O.B. W/ SUPPLY VALVE	(9)
P-12	TILED SHOWER	DELTA T14232 FAUCET & SHOWER HEAD - VERIFY TILE W/ OWNER	
P-13	CUT-OFF VALVE	PROVIDED THIS CONTRACT	
P-14	JACUZZI TUB	WHIRLPOOL VNARI013 54"x30" FREESTANDING TUB W/ DELTA DL7128 TRINSIC SINGLE HANDEL FLOOR MOUNTED FAUCET	

- REMARKS PLUMBING FIXTURE SCHEDULE
- (1) WHITE
 - (2) FIXTURE SUPPLIES & DRAIN SHALL EXTEND NO MORE THAN 6" OUT FROM WALL & SHALL PROVIDE 24" MIN. FLOOR TO BOTTOM - 24" CLEAR UNDER MIN. SINK RIM 34"H MAX - SEE MILLWORK FOR REF
 - (3) FLUSH HANDLE ON TANK TO BE ON OPEN SIDE OF STALL (ENFORCED)
 - (4) DO NOT INSTALL TUB UNIT UNTIL WALL HAS BEEN INSULATED & GYP BD INSTALLED BEHIND TUB
 - (5) PROVIDED & INSTALLED BY PLUMBING CONTRACTOR - SEE APPLIANCE SCHED FOR REF
 - (6) PROVIDE PRE-MFG STAND & AUXILIARY DRAIN PAN, H&C CUT OFF VALVES @ WATER HEATER SEE DETAIL 1/M
 - (7) HUBB DRAINS @ MECHANICAL UNITS SHALL NOT BE INSTALLED IN RETURN AIR SPACE - EXTEND ABOVE MECH PLATFORM WHERE APPLICABLE
 - (8) WATER LINE FROM ICE MAKER OUTLET BOX TO REFRIGERATOR TO BE PROVIDED & INSTALLED THIS CONTRACT
 - (9) LOOSE FLEX COPPER LINES RUN THROUGH CABINETS WILL NOT BE ACCEPTED. LINES MUST BE CONCEALED IN WALL & FIXED TO PRE-MFG BOX

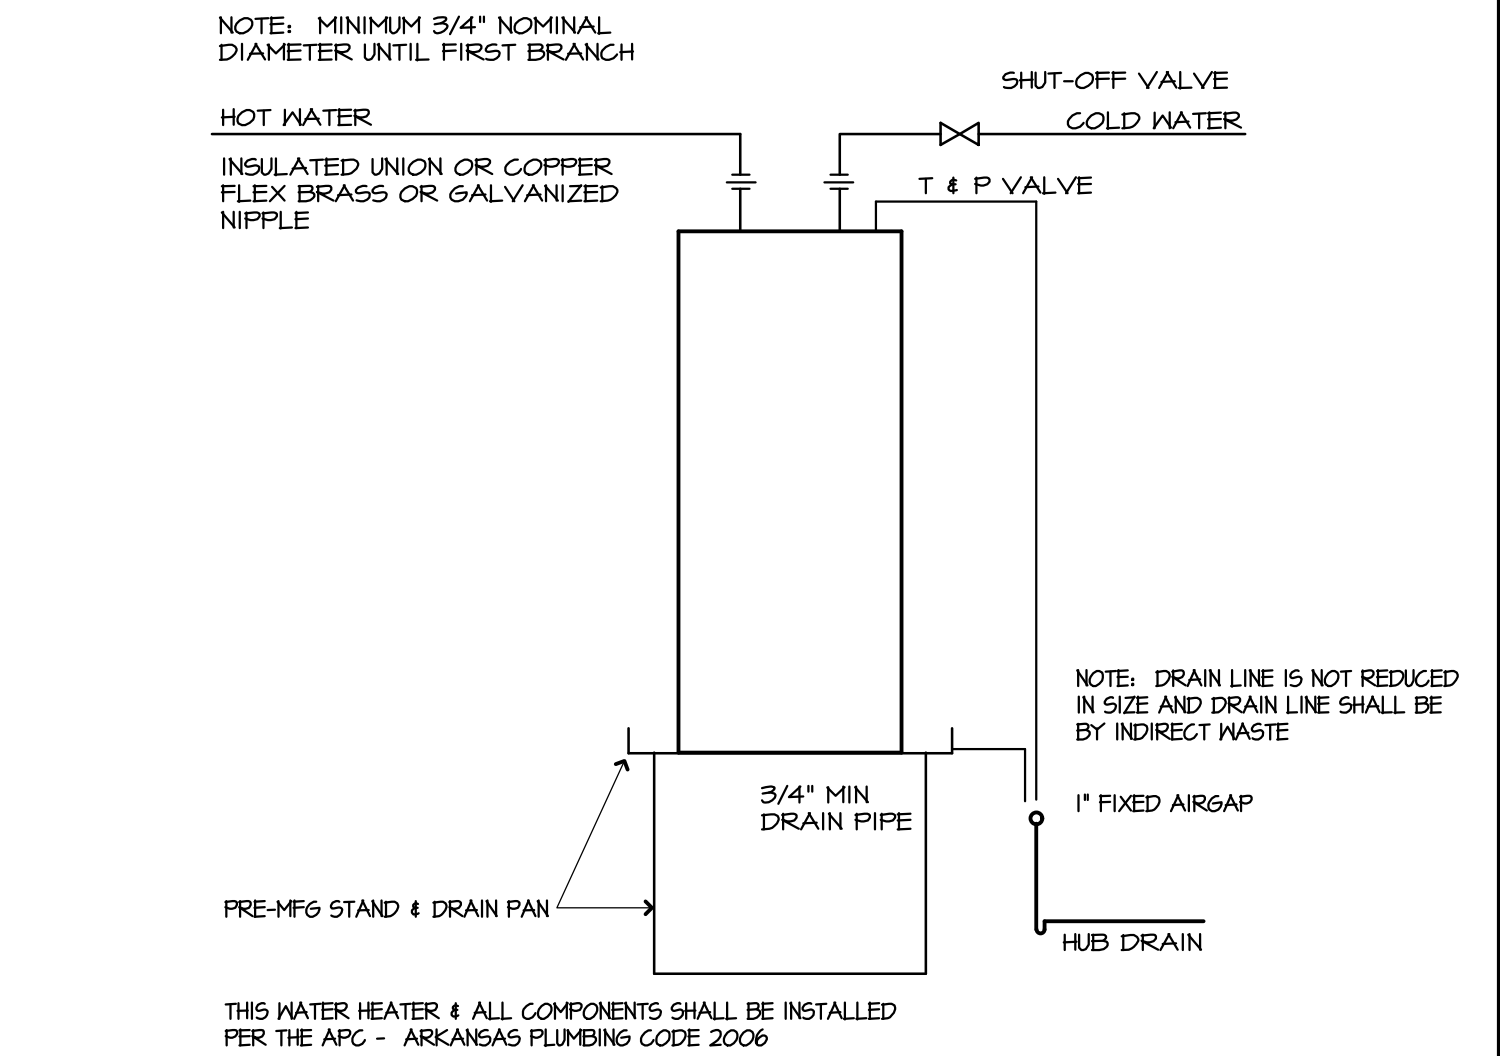

1
6
WATER HEATER DETAIL (TYP - ELEC)
NTS

PLUMBING PLAN
NOTES, DETAILS, AND SCHEDULES


MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

CONV. NO. 45432
DATE: 07/09/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com

MDS



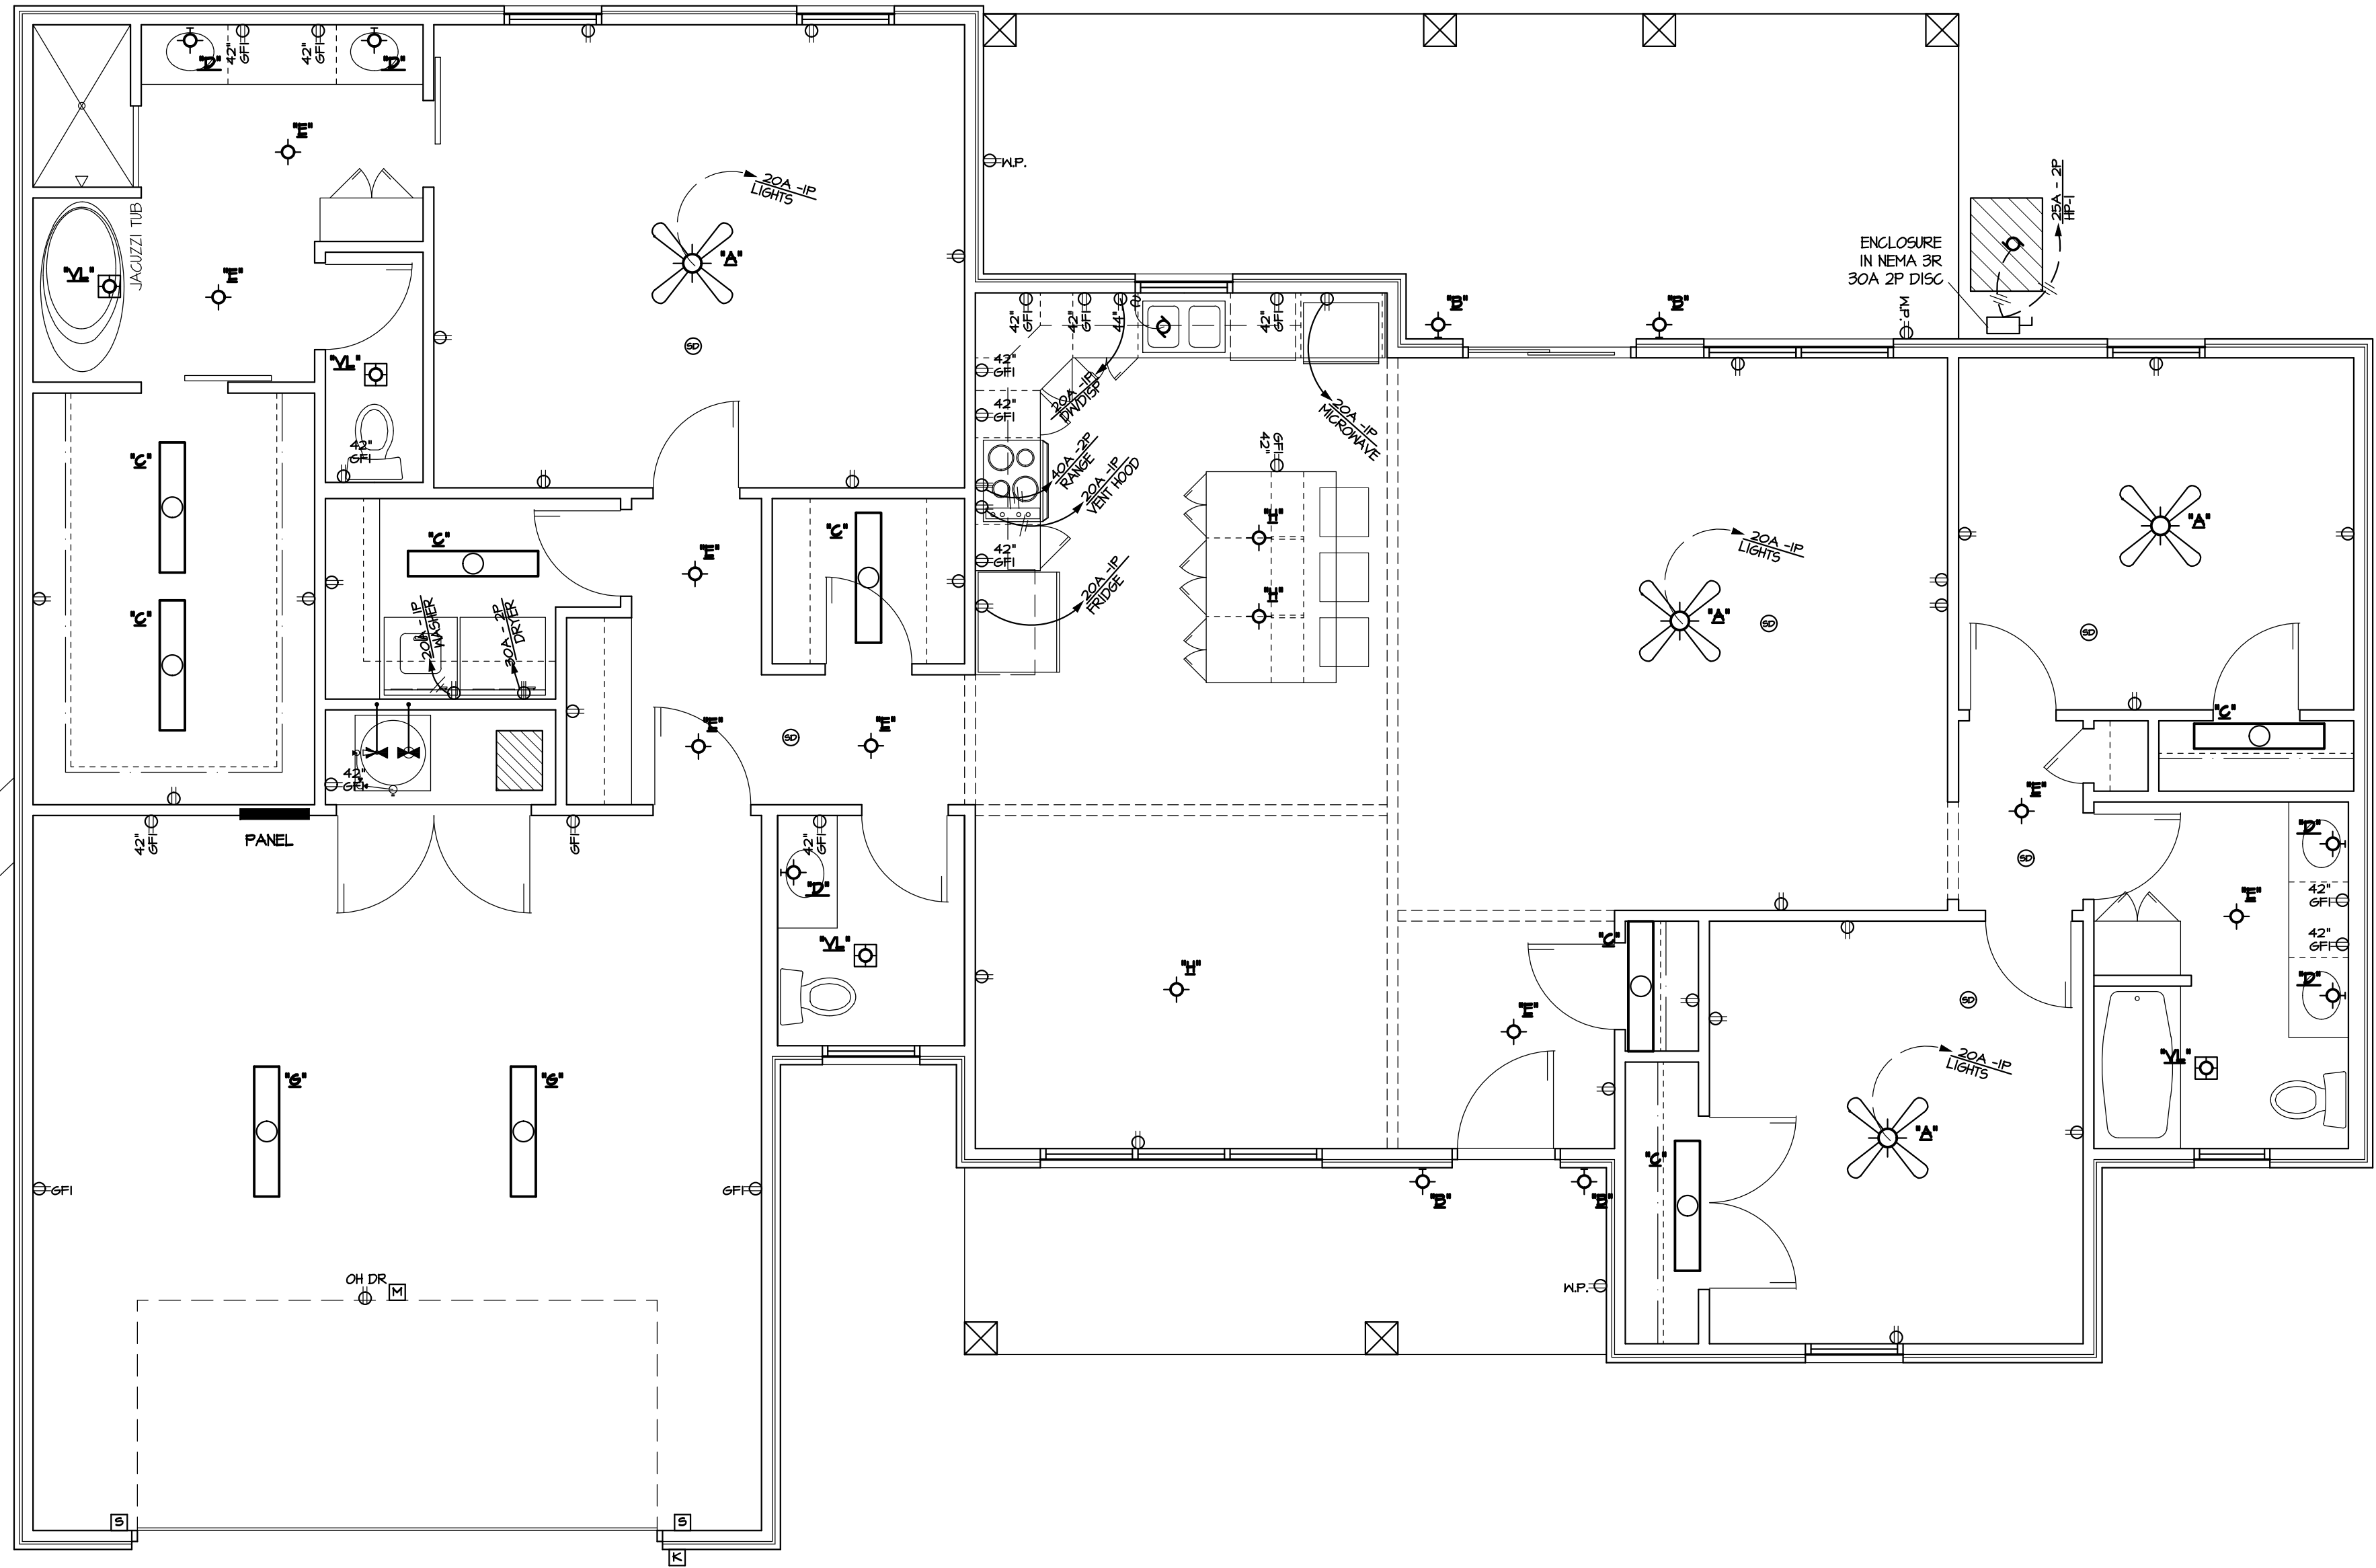

SEE SITE PLAN UTILITY FOR ROUTING
ALL WIRING FOR TELE. & CABLE THIS CONTRACT
TELE. & CABLE BOX LOC.

ALL FEES PAID THIS CONTRACT
VERIFY LOC. W/ UTILITY SITE PLANS
METER & MAIN BREAKER LOC.

ELECTICAL POWER & LIGHTING PLAN

1/4"

ELECTRICAL NOTES:

1. MINIMUM WIRE SIZE SHALL BE 12ga COPPER
2. ARC FAULT BREAKERS SHALL BE USED FOR ALL RECEPTACLES & LIGHTING. INCLUDE SMOKE DETECTORS AS REQUIRED BY N.E.C. ALL RECEPTS TAMPROOF
3. *SD* ALL AREAS EXCEPT KITCHEN, LAUNDRY, AND BATH PER THE NEC 210-12
4. SEE SITE PLAN UTILITY FOR METER / MCB LOCATIONS @ BLDG

ELECTRICAL SYMBOL LEGEND

⊕	DUPLEX RECEPTACLE	■	PANEL BOARD
⊕ _{WP}	DUPLEX RECEPTACLE - WATER PROOF	□	DISCONNECT SWITCH
⊕ _{GF}	DUPLEX RECEPTACLE - GROUND FAULT @ ALL LOCATIONS-NO FEED THRU	⊞	JUNCTION BOX
⊕	220 V. RECEPTACLE	⊞	MOTOR
⊕	SINGLE POLE SWITCH	⊞	MOTOR STARTER
⊕ _L	CLG FAN & LIGHTING CONTROL SWITCH INTEGRATED CONTROLS, (1) SWITCH PLATE LIGHTING & FAN SPEED	⊞	TIMER
⊕ ₃	3 WAY SWITCH	⊞	FLOOR BOX
⊕ ₄	4 WAY SWITCH	○	FLUORESCENT LIGHT
		—	FLUORESCENT LIGHT - STRIP
		—	TRACK LIGHT
		⊕	INCANDESCENT LIGHT - CLG. SURFACE
		⊕	INCANDESCENT LIGHT - WALL
		⊕	INCANDESCENT LIGHT - VENT
		⊕ _{EL}	EMERGENCY LIGHT
		⊕	EXIT LIGHT
⊕	VIDEO OUTLET		
⊕	COMPUTER OUTLET		
⊕ _{TV}	T.V. OUTLET	⊞	INTERCOM MASTER
⊕	TELEPHONE JACK	⊞	INTERCOM PAGING HORN
⊕	BELL / CHIME TYP UNIT	⊞	CLG. MOUNTED INTERCOM SPEAKER
⊕ _{STROBE}	BELL / CHIME BROAN 918 @ 6'-8" A.F.F. ALTRONIX AL624 POWER SUPPLY, STROBE WHEELLOCK WM 31-24-FR TRANS - 120V PRIMARY - 12V OR 24V DC SECONDARY - STROBE IN LIV, BR, & BATH S.I. UNIT ONLY CHIME PUSH BUTTON BROAN 908	⊞	INTERCOM PUSH TO CALL SWITCH
⊕ _{FB}		⊞	MASTER CLOCK
⊕	THERMOSTAT	⊞	CLOCK OUTLET
⊕	EXHAUST	⊞	
⊕	SMOKE DETECTOR FIREX #244 w/STROBE IN BEDROOM AND KITCHEN @ HEARING & SIGHT IMPAIRED UNIT ONLY	⊞	EMERGENCY PULL SWITCH LEVITON DRILL TOGGLE & INSTALL BRAIDED CORD OR CHAIN & END CAP TO FLOOR. SW ON WHEN PULLED DOWN.
		⊞	O.H. DOOR KEYPAD/OPENER
		⊞	O.H. DOOR OPERATOR
		⊞	O.H. DOOR SENSOR


ELECTRICAL FIXTURE SCHEDULE

MARK	DESCRIPTION	LAMP	MOUNTING	REMARKS
"A"	EMERSON CF1050RB w/ LK 700RB LT KIT	(1) 13W, MED BASE CFL	HUGGER	(2)
"B"	PROGRESS F5062-20 w/ TAIL	(1) 60W A CLEAR	WALL	(2)
"C"	PROGRESS F5124-20 4.25'	(2) 60W A19 CLEAR	FLUSH @ CLG	(2)
"D"	PROGRESS F3015-30	(2) T5W A	WALL	(2), (4)
"E"	PROGRESS 5" CAN LIGHT P8061-28-30K	(1) T5W A	RECESSED CLG	
"F"	MEADER BROTHERS IOTTIEB	(3) 26W CFL	SURFACE	(2)
"G"	CRESCENT NL732BL2A	(2) 32W T8 48"L	SURFACE - WRAP	
"H"	PENDENT - SELECTED BY OWNER	(1) T5W A	SURFACE STEM	
"VL"	BROAN 618	(1) 100W A	RECESSED	50 CFM
"SI"	HUBBELL MICO150H350 - VERIFY W/ SITE PLAN	(1) T5W 14H	CONC FTG	(1), (3)

REMARKS

ELECTRICAL FIXTURE SCHEDULE

- (1) REFER TO SITE PLAN ARCHITECTURAL
- (2) ALL FIXTURES TO BE OIL RUBBED BRONZE FINISH
- (3) MOUNT TO CONC. FOOTING PER REQ.
- (4) CENTER VANITY LIGHT ON CENTER OF VANITY - COORDINATE W/ FRAMING. DO NOT INSTALL OFF CENTER

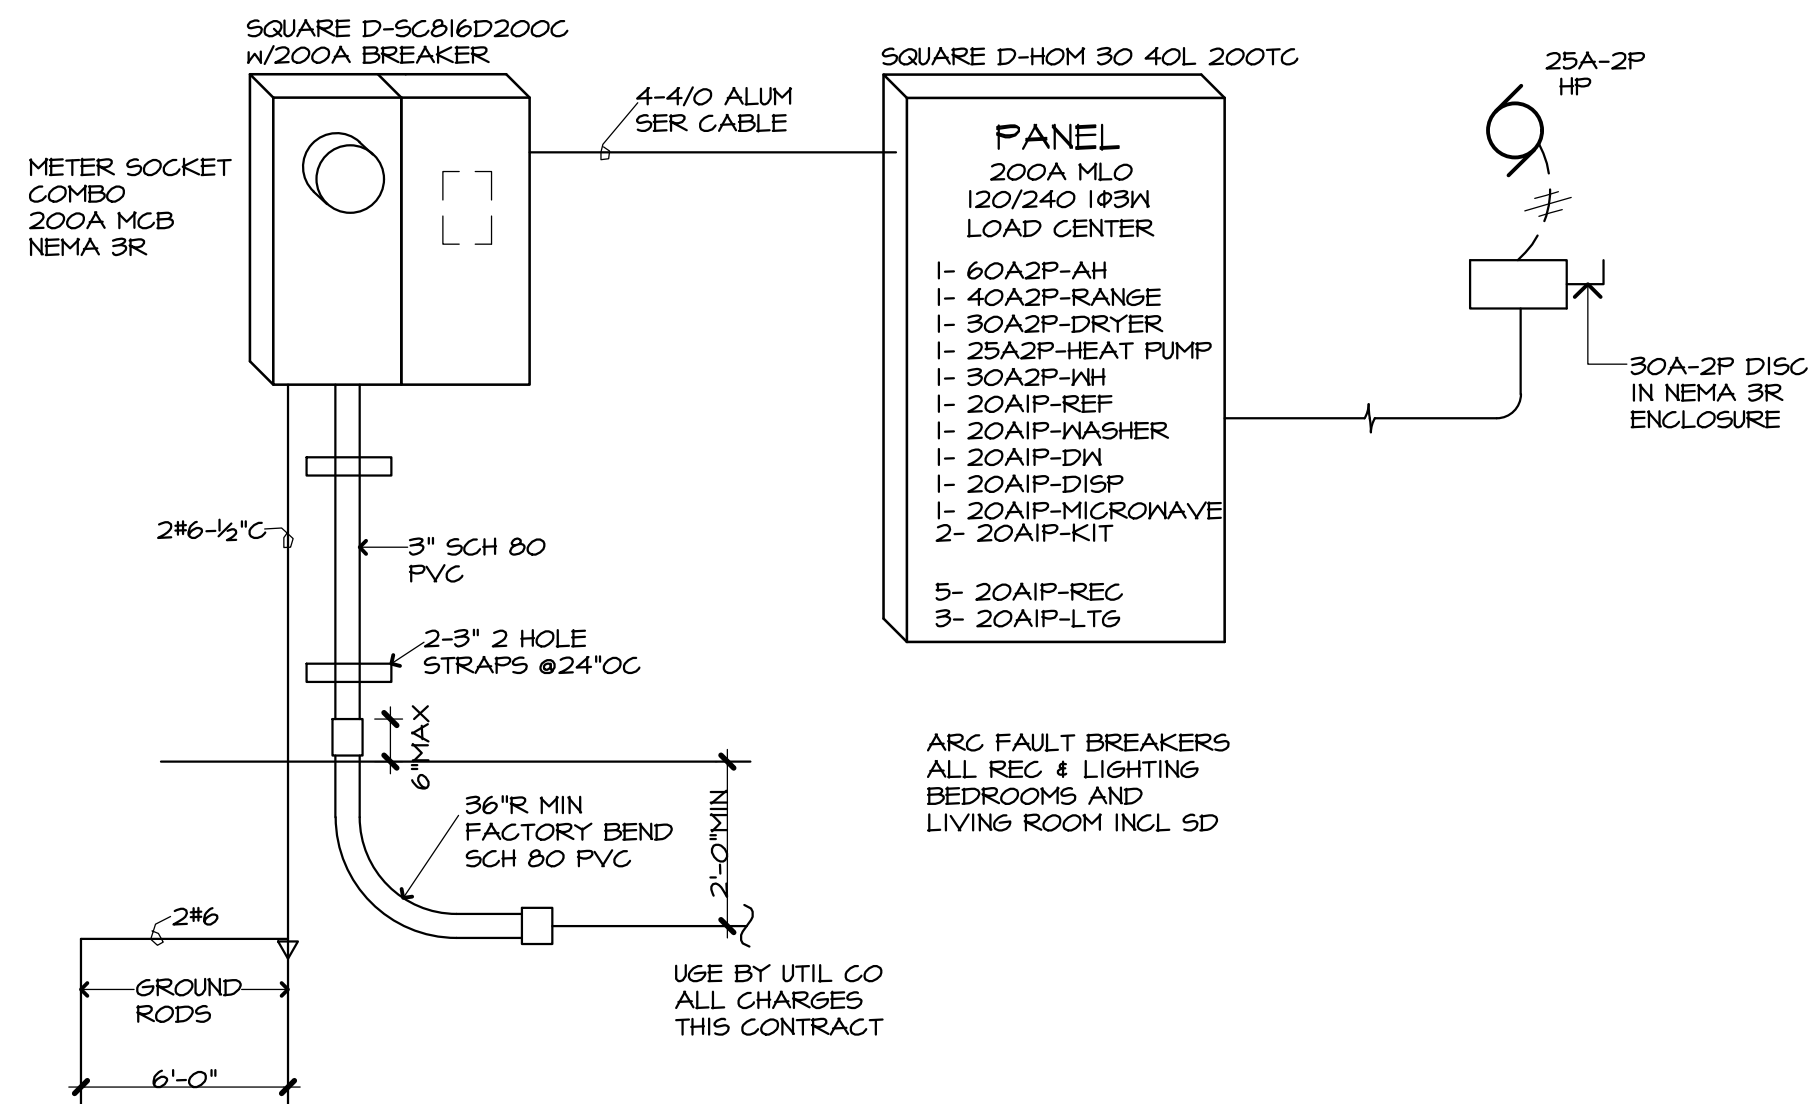

ELECTRICAL POWER DIAGRAM

NTS

NOTE: REFER TO ELEC COMPANY
/ UTIL CO FOR UNDERGROUND SERVICE REQUIREMENTS

ELECTRICAL POWER & LIGHTING PLAN
ELECTRICAL POWER RISER DIAGRAM

MULTI-FAMILY HOUSING FOR:
RIVER BACK ESTATES

CON. NO. 45422
DATE: 07/08/2022
FILE:

MORTIN DESIGN SERVICES, LLC
Commercial & Residential Drafting Consultant
870-284-4054
bmortin.mds@gmail.com

MDS

